



SCOUT LIGHTING
Designed - Built - Shipped - New York


LIGHT/Slice
STATIC WHITE

Project :

Firm :

Type :

Quantity:

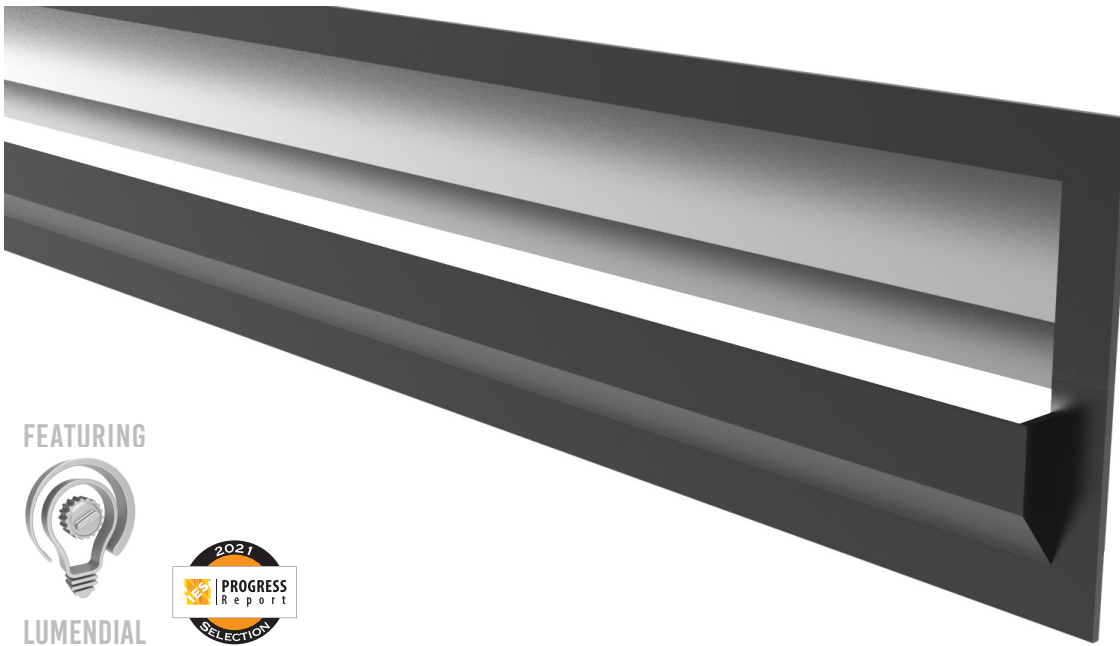

AMERICAN MADE



Intertek
5011600

WARRANTY

5 Years

EFFICACY

150 Lm / Wt

MACADAM

3 Step

CRI

90+

R9

50+

FEATURING



LUMENDIAL



Features

- Fully Assembled
- Rigid Scout Engines
- Cuttable to 1/2 Inch
- Shop drawings for all orders
- Easy Plug and play system
- LumenDial allows you to dial in any lumen output
- Designed for the Contractor
- Solderless Connections
- No Visible hot-spots - ever (with milky lens)
- Endless runs - Inject new power feeds at any point

Applications

- Wall Washing

Mounting

- In Wall
- In Ceiling

2200

2700

3000

3500

4000

5000

Part # Builder

LS	+		+		+		+		+		+	
Prefix	+	Lens	+	Intensity ¹	+	CCT	+	Finish ²	+	Control	+	Wire length ⁵
LightSlice Fixture		FF - Flat Frosted Visible Diodes		SL - Sup. Low L - Low		22 - 2200K 27 - 2700K		M - Mill W - White		0 - None 1 - 0-10 2 - DMX 3 - POE 4 - Phase		12" 24" 48" 96"
		FM - Flat Milky No Imaging		M - Medium H - High SH - Sup. High LD - Lumen Dial ¹		30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K		B - Black Custom RAL #		5 - Lutron Hi-Lume 1% EcoSystem w/ SO-FTB 6 - Lutron Hi Lume 1% 3 Wire-G 7 - Lutron Hi Lume 1% Forward Phase 2-Wire 120V		Custom

¹ LumenDial : Custom Output : The Scout Engines can be programmed for any lumen output from 1 to 1,400 lumens per foot. Contact Factory for more info.

² Finish : Mill Finish comes standard. Cost Adder for Powder Coating. Contact Factory for Custom RAL#.

³ Feed : See Feed details on page 4

⁴ See Blind Cove details on page 5.

⁵ Wire Length : Standard 12"

⁶ Ordering info on page 9.





SCOUT LIGHTING
Designed - Built - Shipped - New York

LIGHT/Slice
STATIC WHITE

SCOUT RECOGNIZED 2021 IES PROGRESS REPORT



"Scout has released its Select Linear Accent Lighting Line as the first linear accent lighting product that is cuttable every 1/2-inch with the ability to burn in a specific lumen and wattage output at time of assembly. The client is able to choose from 1 to 1400 lumens per linear foot. Their proprietary boards have low-profile male / female connectors and the engines are designed with side and rear feed points every inch." - IES Progress Report

OUR PHILOSOPHY

At Scout, everything we do is driven by three simple philosophies:

- We do the job that needs to be done.
- If something isn't perfect we'll do it again, regardless of time.
- We design what we love and love what we design.

We proudly stand on the front-line of the industry - taking risks to achieve superior and simpler product. **THIS IS THE WAY OF THE SCOUT.**



LUMEN_DIAL

ANY LUMEN VALUE: BETWEEN 1 - 1,400 PER FOOT
ANY WATTAGE: BETWEEN 0.1 - 10 PER FOOT
DIALED IN TO YOUR SPECIFICATION

Scout's proprietary award-winning light engines have the ability to dial in any intensity or wattage you desire without changing a thing on the engine. We can guarantee you'll never have a hot spot or shadow again.

QUICKSHIP 
7-10 DAYS

Designed • Built • Shipped
NEW YORK






SCOUT LIGHTING
Designed - Built - Shipped - New York

LIGHT/Slice
STATIC WHITE

THE SCOUT ENGINES - THE HEART OF EVERY FIXTURE



STATIC WHITE



TUNEABLE WHITE




RGB WHITE

SCOUTS AWARD-WINNING RIGID ENGINES HAVE BEEN EXPANDED TO INCLUDE TUNEABLE WHITE AND RGBW



Our propriety patented engines feature solderless connectors and low-profile male / female connectors, enabling simple snap-together installation. Throw in the ability to inject power from either side or the rear, and we can offer you limitless runs without ever having a break in your light.

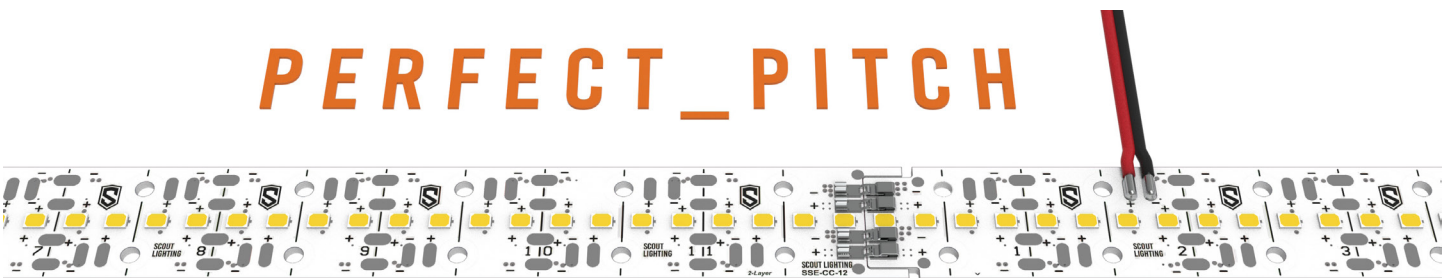



Quick Specifications

LED SYSTEM

Proprietary linear LED Scout Engine incorporates premium Cree LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance.
Available in 2200K, 2700K, 3000K, 3500K, 4000K or 5000K in 90+ CRI. LED modules and drivers are replaceable.
Color accuracy <3 SDCM

CONSTRUCTION

One piece extruded aluminum housing. Cast aluminum end caps.

OPTICS

Extruded High Transmission Milky Acrylic Lens with No LED imaging.
Extruded High Transmission Frosted Acrylic Lens with LED imaging.

ELECTRICAL

Fixture come preassembled with 8" whip.
All Drivers are installed in remote location.
All drivers are Universal input 120-277 VAC.
Standard Constant Current drivers include 0-10V dimming preinstalled in an enclosure.

LABELS

Conforms To UL STD 2108 Certified To CSA STD C22.2 # 250.0
Suitable for Dry or Damp Locations, indoor use only.


FINISH

Standard Mill Aluminum Finish.
Powder Coating to any RAL# available upon specification

WARRANTY

5 Year Limited Warranty - Covers all Scout manufactured products.
Default to manufactures warranty for all 3rd party components.

Dimensions

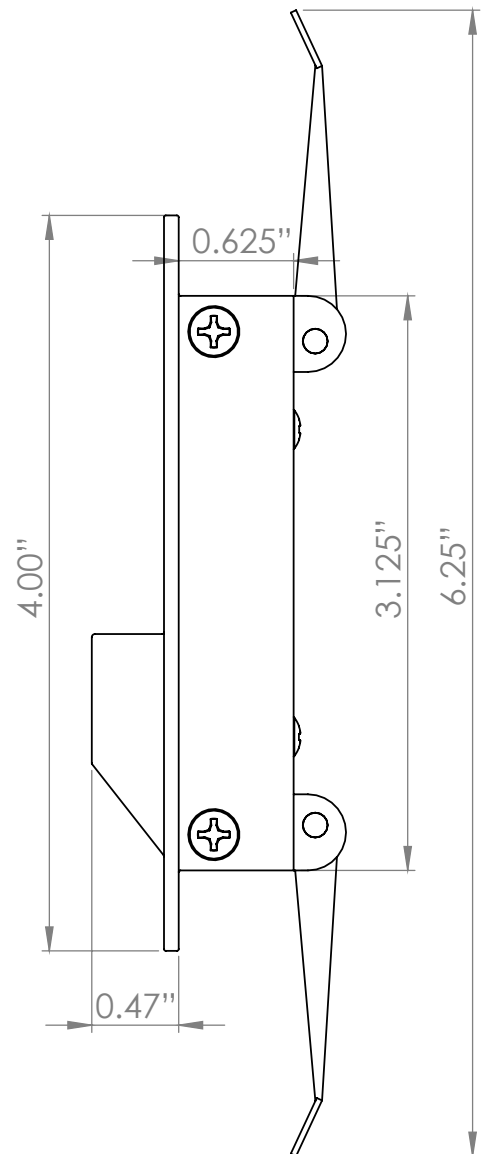

Frosted Lens : Visible Diodes - 5% Light Loss

OUTPUT	SL	L	M	H	SH
Lumens / Foot	219	388	644	1092	1273
Watts / Foot	1.6	2.8	4.8	8.3	9.8
Lumens / Watt	139	138	135	131	129

Milky Lens : No Imaging - 50% Light Loss

OUTPUT	SL	L	M	H	SH
Lumens / Foot	115	204	339	575	670
Watts / Foot	1.6	2.8	4.8	8.3	9.8
Lumens / Watt	73	72	71	69	68






SCOUT LIGHTING
Designed - Built - Shipped - New York

LIGHT/Slice
STATIC WHITE

Fixture Anatomy

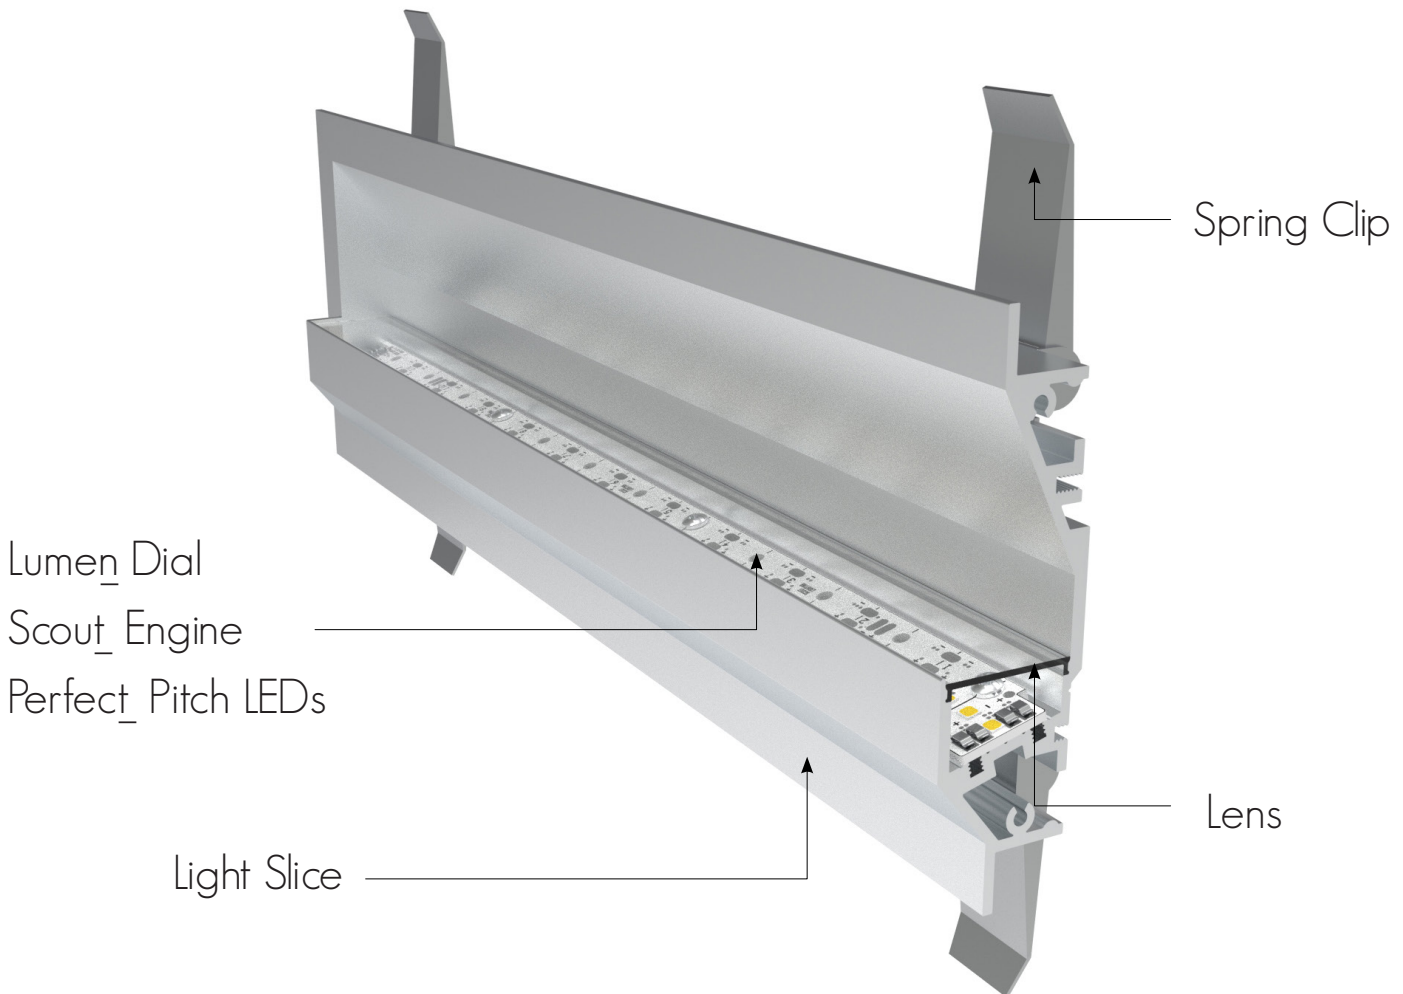

Perfect_Pitch LEDs

Achieve an uncompromisable layer of architectural lighting at any intensity through LED spacing that never change with the intensity. This means no hot-spots and imaging when paired with the Milky lens.

Light Slice

Designed to evenly illuminate your wall, ceiling or floor with simple integration into 5/8" sheet rock.

Each fixture is 100% custom to you.
Pre assembled and cut to the 1/2 inch

Lumen_Dial

A patent pending circuit design delivers 3 separate intensities within a single engine. One engine, one pitch is the only way to simply and brilliantly bring a vision to reality.

Lens

Scout offers multiple lens options for you. Frosted lens for maximum output, Milky lens for visible hot-spot free illumination.

Scout_Engine

Rigid boards Plug and Play together.

Cutttable to 1/2 Inch


Spring Clip

Scout's Spring clips are designed to snap your LightSlice fixture into place when mounted into 5/8" Sheet Rock!






Candela Plots

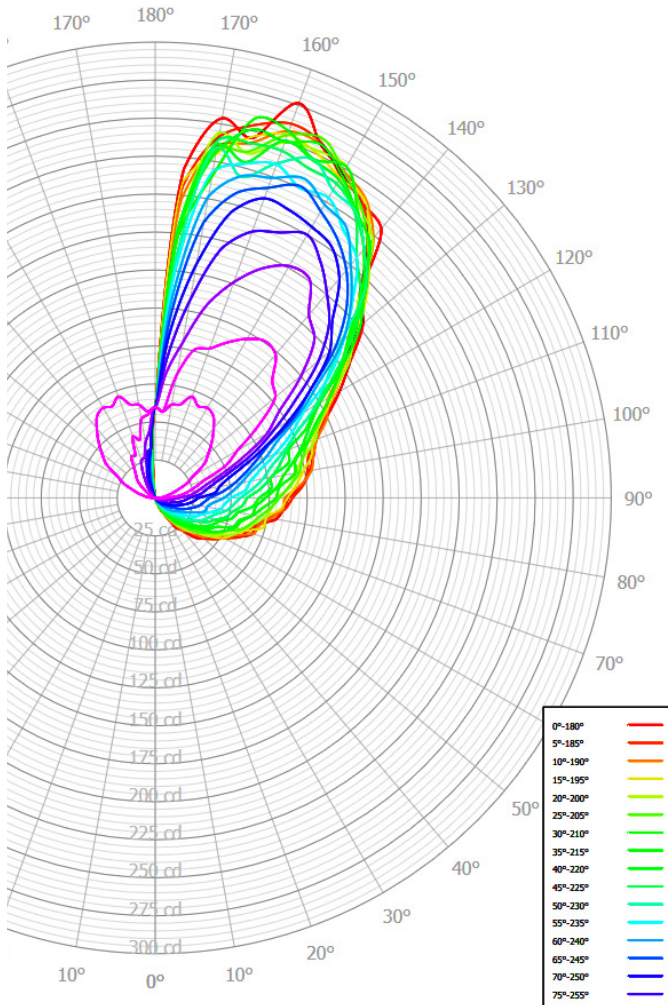

Frosted Lens

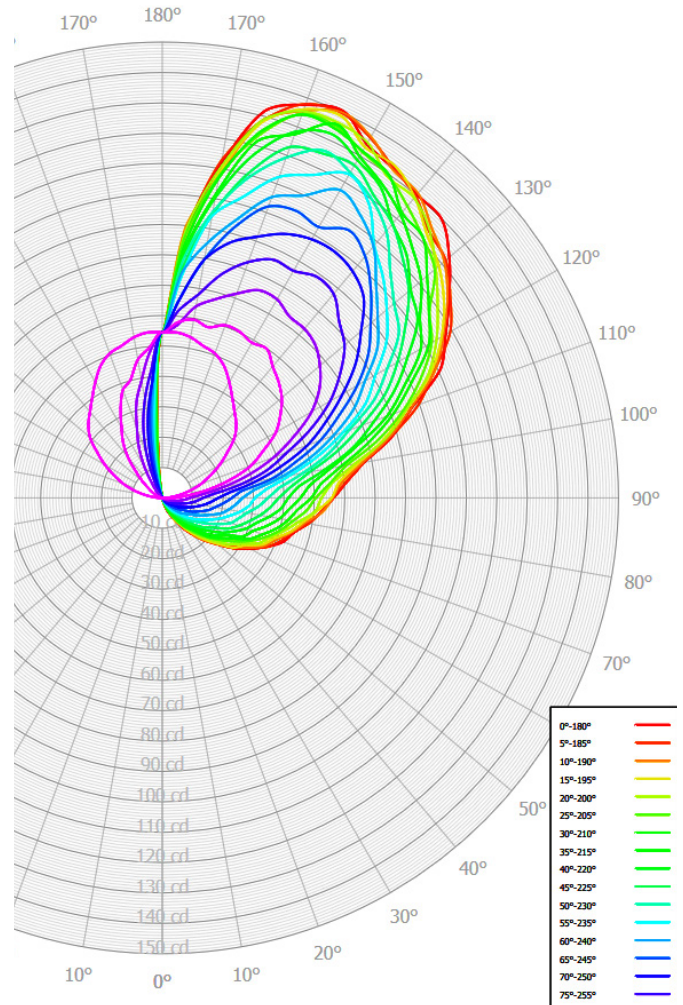

Milky Lens


Tested at Medium Intensity - 3000K

IES Files available online at www.ScoutLighting.com





Light Throw

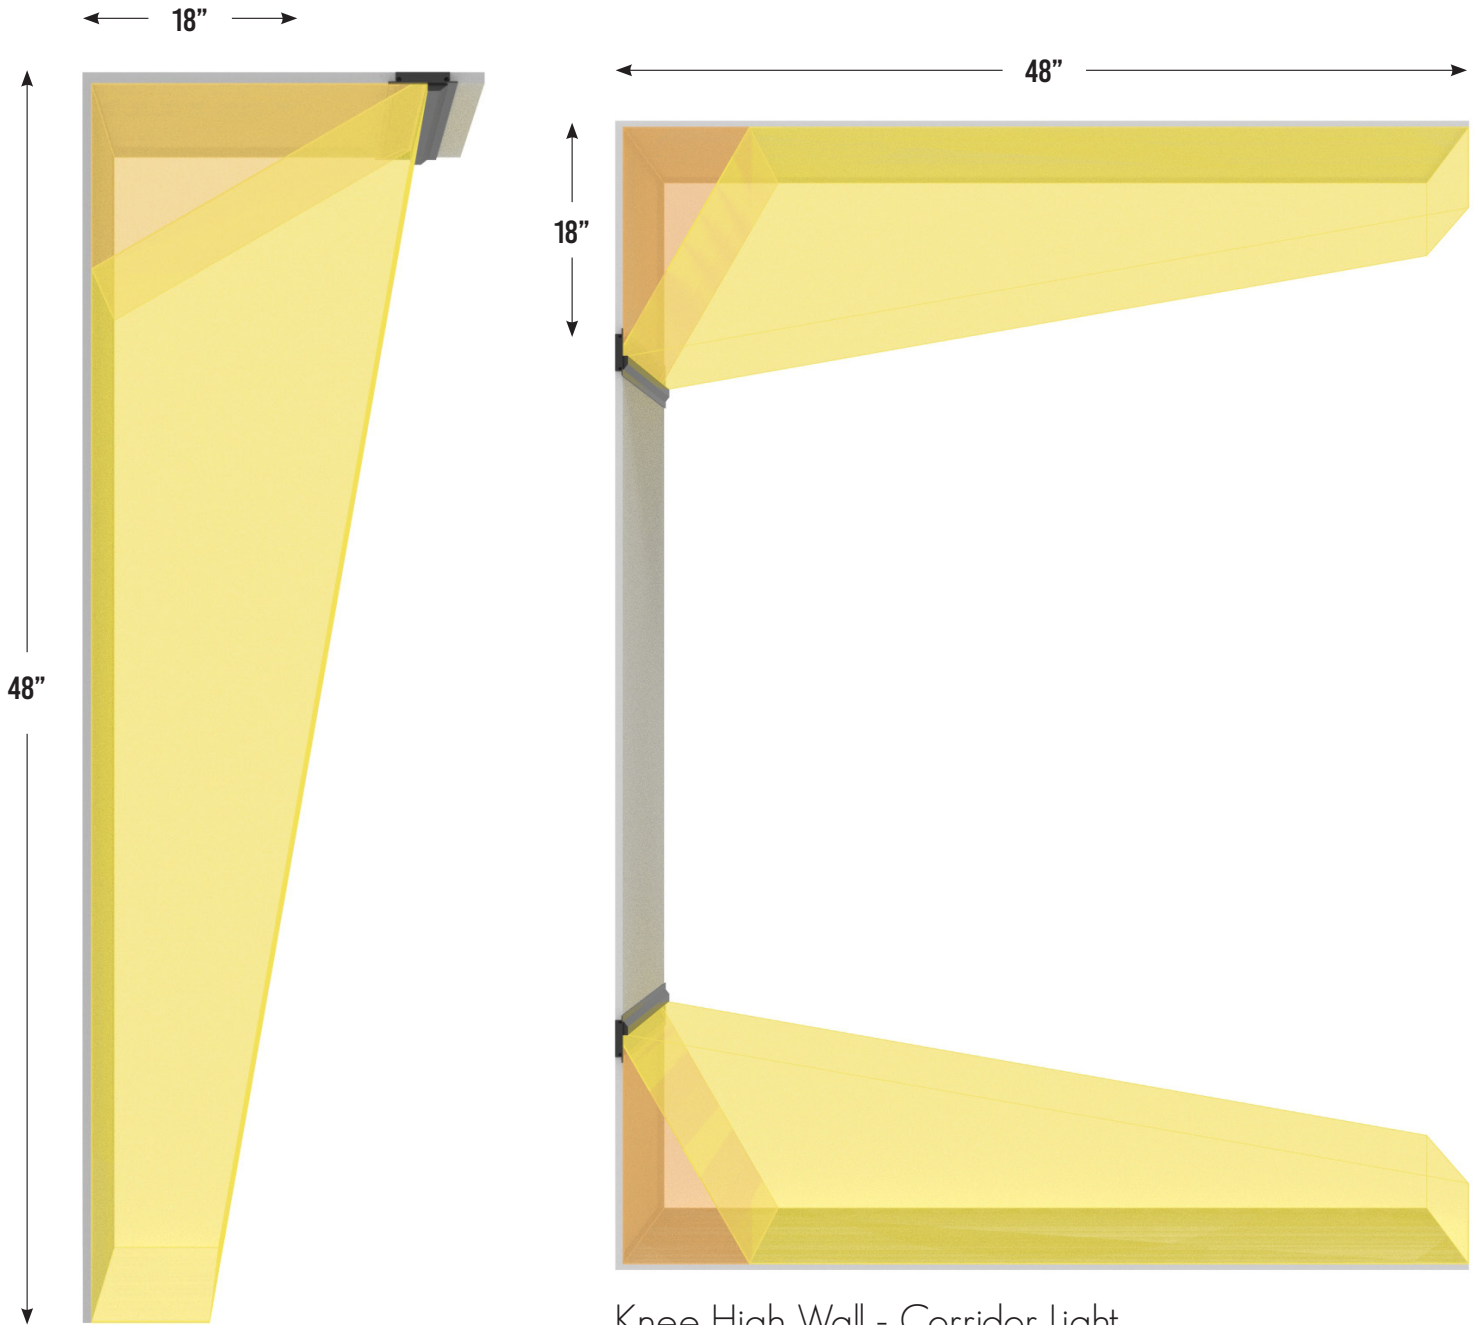

Knee High Wall - Corridor Light






SCOUT LIGHTING
Designed - Built - Shipped - New York

LIGHT/Slice
STATIC WHITE

Feed Options

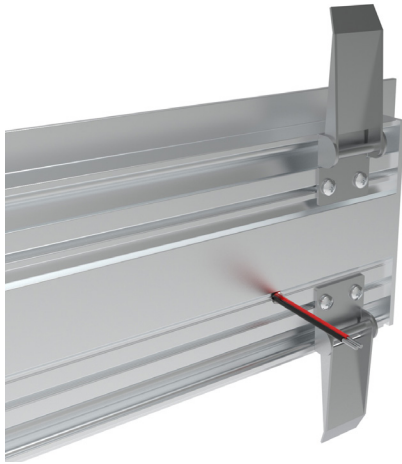

Standard Feed
Remote Driver

Standard single driver feed comes out 2" from end of fixture!



Multi Feed
Remote Driver

Scout can inject multiple power feeds into a single fixture length to ensure you never have a dark spot!

Finish



Powder Coat any Scout Fixture to any RAL #
LightSlice come standard in Gloss White.

Your Fixture. Your Design. Customized.

Lumen Dial




Scout's propriety Scout Engine can be dialed into any lumen or wattage value.

From 1 Lumen to 1,400 per foot!





Drivers

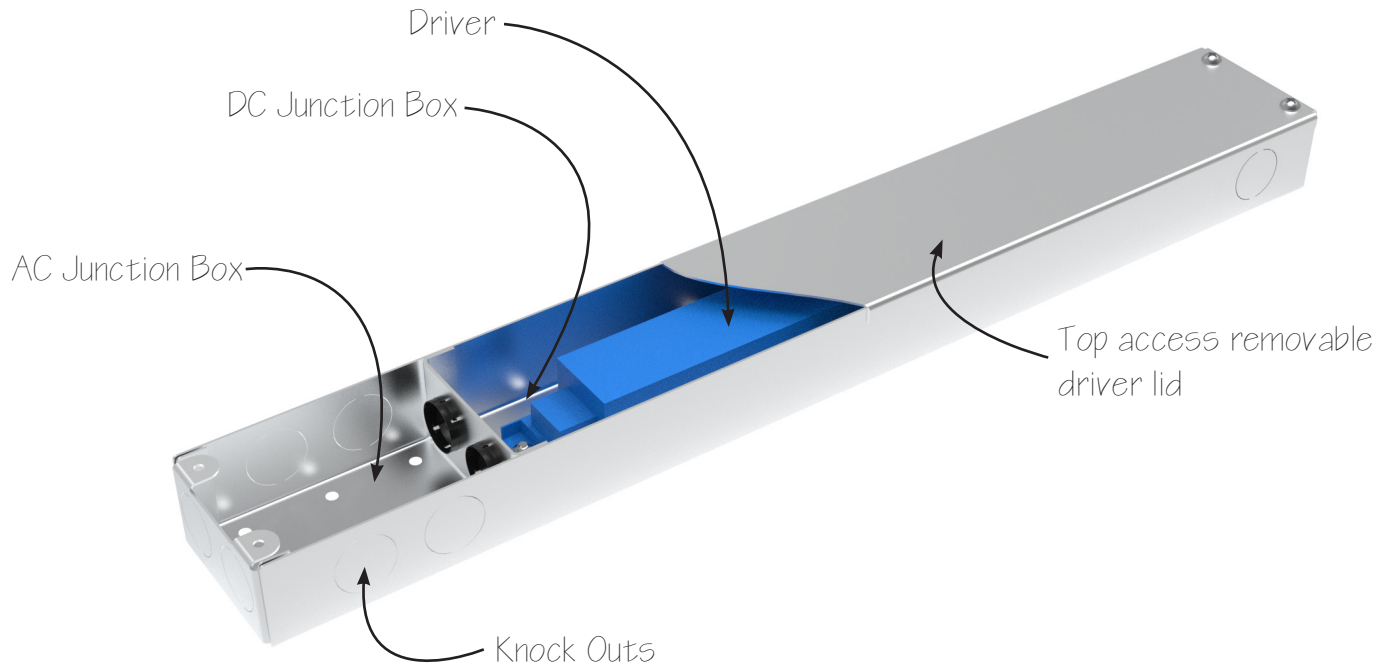

All scout drivers come preinstalled inside of NEMA rated enclosures. Our proprietary driver enclosures come with AC and DC Junction boxes and knockouts around the perimeter. Contractors can use our AC junction box to make branch circuit connections.

Max Load (2000mA)

Super Low (50mA)	40 Feet
Low (89mA)	22 Feet
Medium (149mA)	13 Feet
High (250mA)	8 Feet
Super High (300mA)	5 Feet


Max Distance

20 AWG	20 Feet
18 AWG	40 Feet
16 AWG	60 Feet
14 AWG	100 Feet
12 AWG	150 Feet







0-10 Wiring

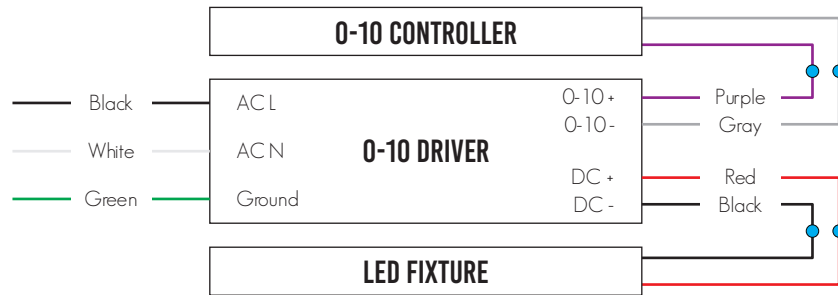

Phase Wiring

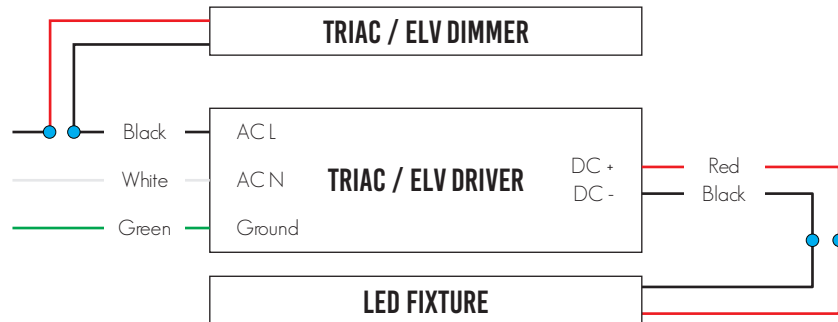

DMX Wiring

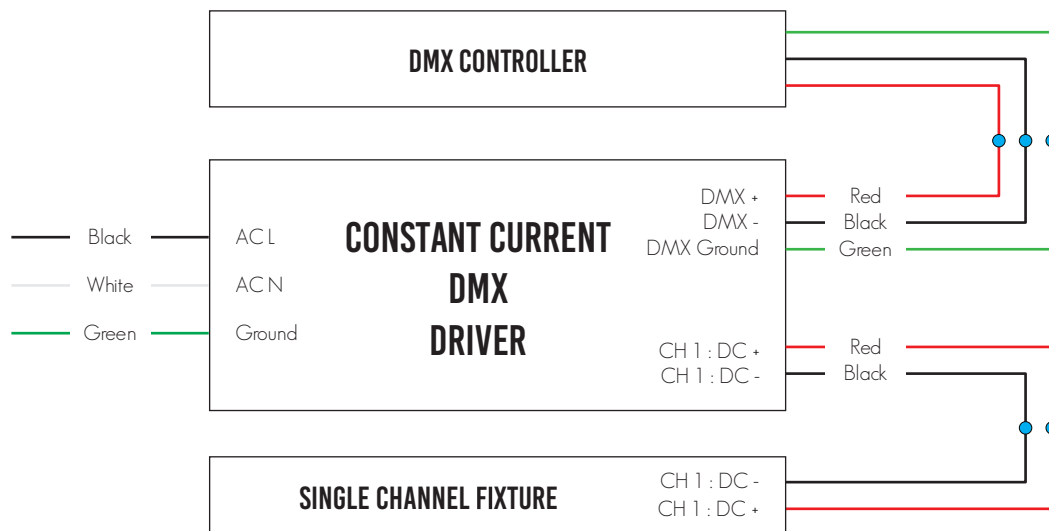



Specification Details

INTENSITY	S. LOW	LOW	MEDIUM	HIGH	S. HIGH
Watts / Foot	1.6	2.8	4.8	8.3	9.8
mA / Foot	50	89	149	256	300
Frosted Lens: Lumens/ Foot	219	388	644	1092	1273
Frosted Lens: Lumens/ Watt ¹	139	138	135	131	129
Milky Lens: Lumens/ Foot	115	204	339	575	670
Milky Lens: Lumens/ Watt ¹	73	72	71	69	68
Color Temperatures (K)	2200, 2700, 3000, 3500, 4000, 5000				
CRI	90+				
R9	50+				
MacAdams Ellipses	3 Steps				
Beam Angle ²	120 Degrees				
IP Rating	IP20 - Dry Location				
Lamp Life	50,000 Hours				
Dimming / Control ³	0-10 / POE / DMX / DALI / PHASE / LUTRON				
Operating Temperature	-13°F to 122°F				
Warranty	5 Years				
Max Driver Load at 2A	40 Feet	22 Feet	13 Feet	8 Feet	5 Feet
ETL	Conforms To UL STD 2108 - Certified To CSA STD C22.2 # 2500				

CCT	LUMINOUS FLUX
2200K	82%
2700K	100%
3000K	100%
3500K	115%
4000K	118%
5000K	106%

LUTRON	
LDEI	Hi-Lume 1% EcoSystem. Soft On, Fade to Black
L3DAE	Hi-Lume 1% EcoSystem
L3DA3W	Hi-Lume 1% 3 WIRE+G
ITEA	Hi-Lume 1% 120V. 2-WIRE Forward Phase

Ordering Details

- All fixtures come standard with starter end cap feed unless otherwise specified.
- All Scout Select Fixtures come preassembled up to 8 feet long with 8" power feed.
- Any Fixture length under 8 feet long will be made as a complete fixture.
- Any Fixture length over 8 feet long will be broken into 6 foot lengths + the balance length.
I.E. A 10 Foot Fixture will be broken into 1 length @ 6 Feet and 1 @ 4 Feet.
- Fixtures daisy chain together with Scout_Lock™ Technology. See figures 1.1 and 1.2 below.
- In situations where fixtures are longer than the maximum wattage load new power will be injected from either the side or rear. Standard Injection is side Feed 1.
- All orders come with an approval drawing. Fabrication will not begin until drawing has been signed off or waived.

¹ Lumens / Watt takes into account nominal driver efficacy at full load

² Beam Angle with Milky Lens


³ Not all dimmers / drivers compatible contact factory for testing






Installation

Function

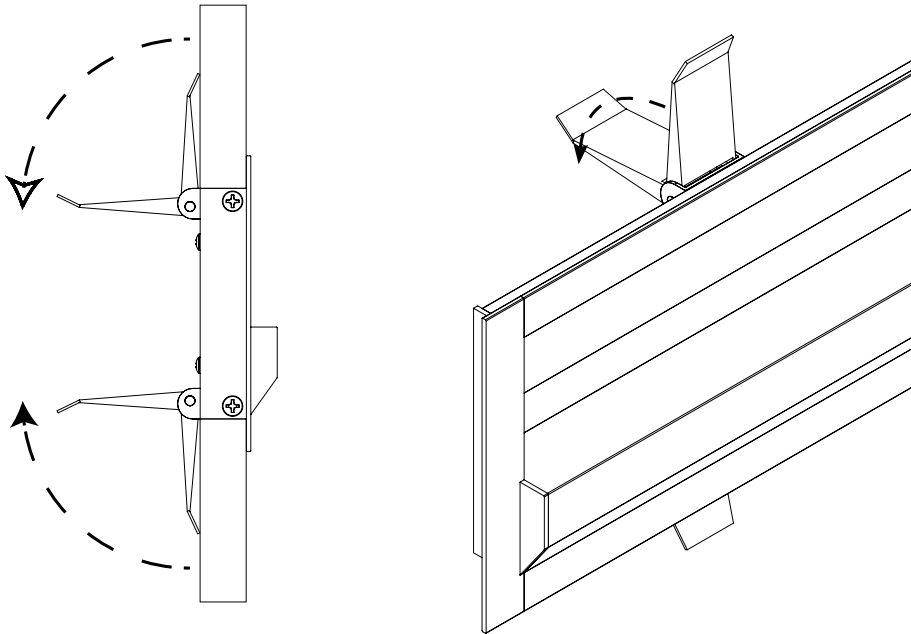

Spring clips rotate down to
slide into wall

Step 1 - Make Slot

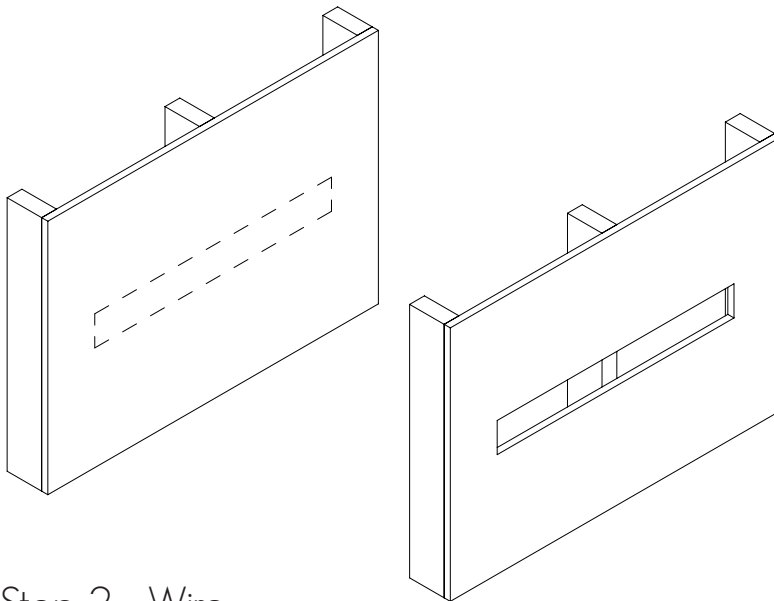

Cut a straight level slot out of a 5/8" thick
piece of sheet rock

Slot should be 3.125" High by the length of
the fixture + 1/4 of an inch..

Step 2 - Wire


Splice your wire that was run from the remote driver to the back of the LightSlice feed.






Installation

Step 3 - Install - Clips Down

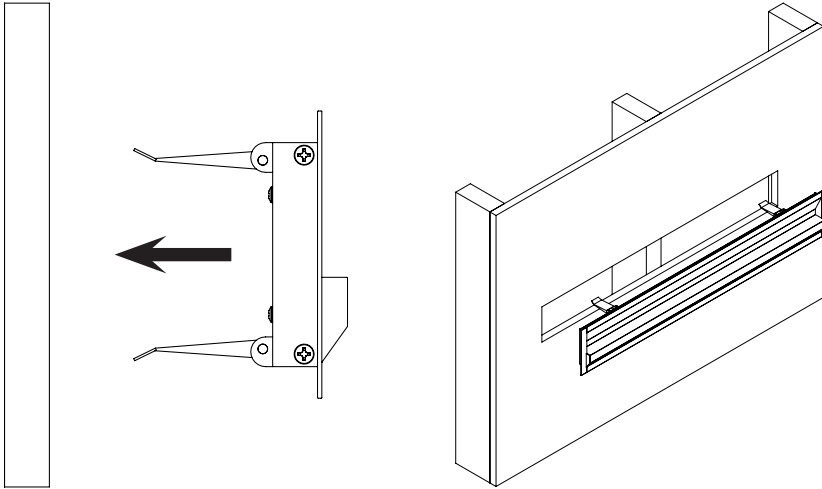

Bring the Spring Clips to their lowest position and slide the fixture into the wall.


Step 4 - Install - Clips Up

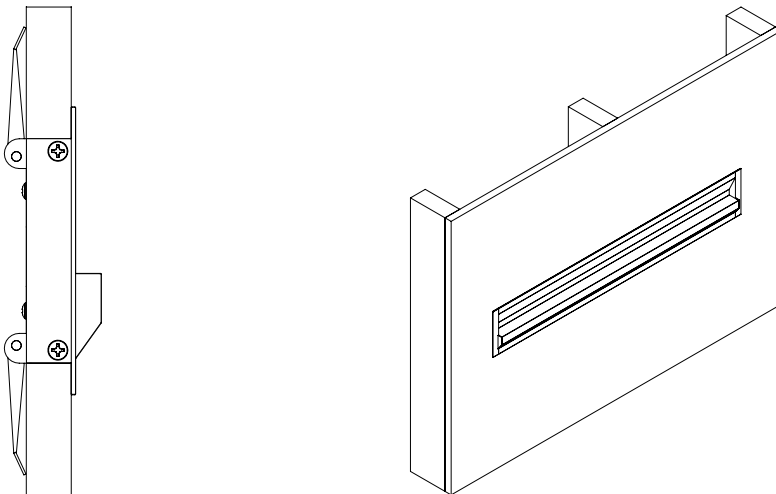

The Spring Clips will automatically spring open holding the LightSlice in the wall.

To Remove the fixture v

Fixture Joining

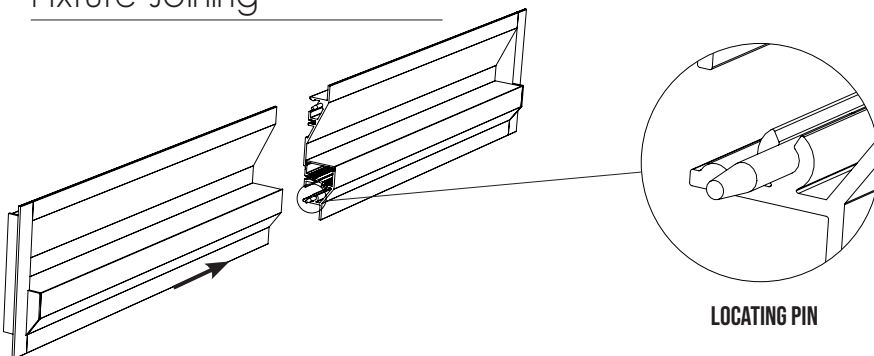

The LightSlice fixtures have alignment pins preinstalled. Simply slide the units together.

