


# T Grid Reveal


SCOUT

## Dimensions

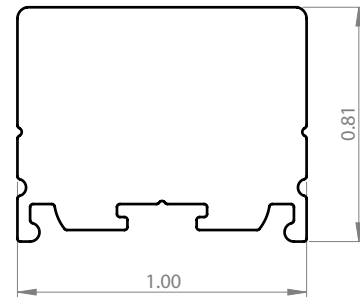

## Optics

Square Milky

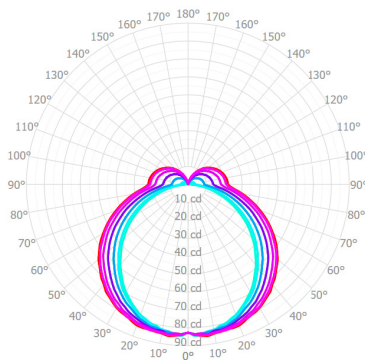

## Spec Lock

- LED specially binned through forward voltage within a 3-step MacAdam ellipse for increased CCT fidelity and smooth lower end dimming.
- Mechanically fastened Rigid PCB set within an extruded aluminum channel for simple installation and total serviceability.
- Pressure fit metal pin connection for solderless in-field connection between LED boards for a seamless appearance.
- Flexible power feed injections maintain LED pitch consistency for a plethora of mounting options.
- Never a shadow, hotspot nor break in light no matter the output and run length.
- No double-sided adhesion (tape) or soldering during installation.



Scout Lighting reserves the right to modify this specification without prior notice. Updated 4/23/24

# T Grid Reveal

SCOUT

## Part # Builder

SS-SL	+		+		+		+		+		+		+		+		+		+		+	
Fixture		1		2		3		4		5		6		7		8		9		10		11

Fixture	1 : Lens	2 : Intensity <sup>1</sup>	3 : Color Temp
SS-SL : Reveal	SQM : Square Milky	SL : Super Low (115lm/1.6w per ft) L : Low (204lm/2.8w per ft) M : Medium (339lm/4.8w per ft) H : High (575lm/8.3w per ft) SH : Super High (670lm/9.8w per ft) LD : LumenDial (Consult Factory)	22 : 2200K 27 : 2700K 30 : 3000K 35 : 3500K 40 : 4000K 50 : 5000K TW2235: 22K-35K TW2750: 27K-50K
4 : Finish <sup>2</sup>	5 : Feed <sup>3</sup>	6 : Control	7 : Mounting
M : Mill Finish W : Gloss White (Cost Adder) B : Matte Black (Cost Adder) C : Custom RAL# (Cost Adder - Consult Factory)	RF : Rear Feed	0 : None 1 : 0-10 ~1% Dimming 2 : 0-10 ~ 0.1% Dimming 3 : DMX/ DALI 4 : POE 5 : ELV / MLV / Phase 6 : 0-10 Tuneable White 7 : 0-10 Warm Dim 8 : Lutron Hi-Lume 1% Ecosystem W/ SO-FTB 9 : Lutron Hi Lume 1% 3 Wire + G 10: Lutron Athena Wireless Node - RF Only 11: Casambi 12: nLyte 13: Enlighted 14: Other - Consult Factory	T9/16 : T-Grid 9/16 T15/16 : T-Grid 15/16 Slot : Slot Grid T9/16 D : T-Grid 9/16 W/ .25" Drop T15/16 D : T-Grid 15/16 W/ .25" Drop Slot D : Slot Grid W/ .25 Custom : Consult Factory
8 : Blind Cove <sup>4</sup>	9 : Wire Length	10 : Shape	11 : Fixture Length
Y : Yes N : No	12" 24" 48" 96" Custom - (Consult Factory)	S - Straight U - U Shape L - L Shape R - Rectangle P - Pattern (Consult Factory)	X' Y"

## Square Milky

OUTPUT	SL	L	M	H	SH
Lumens/Foot	115	204	339	575	670
Watts/ Foot	1.6	2.8	4.8	8.3	9.8
Lumens/Watt	73	72	71	69	68



Driver Wiring



Installation Guide

## Specification Details

	LENS	LIGHT LOSS	VISIBLE DIODES	SUPER LOW	LOW	MEDIUM	HIGH	SUPER HIGH
Watts / Foot	N/A			1.6	2.8	4.8	8.3	9.8
mA / Foot	N/A			50	89	149	256	300
Square Milky: Lumens / Foot	Milky	50%	No	115	204	339	575	670
Square MilkyLumens / Watt <sup>1</sup>	Milky	50%	No	73	72	71	69	68
0-10 / Lutron Athena Node	Max Output 2000mA			40 Feet	20 Feet	12 Feet	6 Feet	4 Feet
Phase	Max Output 700mA			14 Feet	7 Feet	4 Feet	2 Feet	1 Foot
DMX/DALI	Consult Factory							
POE	Consult Factory							
Lutron Drivers	LDE1 Hi-Lume 1% EcoSystem. Soft On Fade to Black				L3DA3W Hi-Lume 1% 3 WIRE+G			
Color Temperatures (K) + Flux	2200 (82%), 2700 (100%), 3000 (100%), 3500 (115%) , 4000 (118%), 5000 (106%)							
CRI	90+							
R9	50+							
MacAdams Ellipses	3 Steps							
Beam Angle <sup>2</sup>	120 Degrees							
IP Rating	IP20 - Dry Location							
Lamp Life	50,000 Hours							
/Dimming / Control <sup>3</sup>	0-10 / POE / DMX / DALI / PHASE / LUTRON / LUTRON WIRELESS							
Operating Temperature	-13°F to 122°F							

**FINISH**

Standard Mill Aluminum Finish.

Powder Coating to any RAL# available upon specification

Increased pricing for powder coating.

**Warranty**

2 Year Limited Warranty - Covers all Scout manufactured products.

Default to manufactures warranty for all 3rd party components. Does not cover labor.

**ORDER DETAILS**

- All fixtures come standard with starter end cap feed unless otherwise specified.
- All Scout Select Fixtures come preassembled up to 8 feet long with 8" power feed.
- Any Fixture length under 8 feet long will be made as a complete fixture.
- Any Fixture length over 8 feet long will be broken into 6 foot lengths + the balance length. A 10 Foot Fixture will be broken into 1 length @ 6 Feet and 1 @ 4 Feet.
- Fixtures daisy chain together with Scout Lock™ Technology.
- In situations where fixtures are longer than the maximum wattage load new power will be injected from either the side or rear. Standard Injection is side Feed 1.
- All orders come with an approval drawing. Fabrication will not begin until drawing has been signed off or waived.

<sup>1</sup>Lumens / Watt accounts nominal driver efficacy at full load

<sup>2</sup> Finish: Mill Finish comes standard. Cost Adder for Powder Coating. Contact Factory for Custom RAL#

<sup>3</sup>Feed: See Feed Details on page 4

**LED SYSTEM**

Proprietary linear LED Scout Engine incorporates premium Cree LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance.

Available in 2200K, 2700K, 3000K, 3500K, 4000K or 5000K in 90+ CRI. LED modules and drivers are replaceable.

Color accuracy <3 SDCM

**CONSTRUCTION**

One piece extruded aluminum housing. Cast aluminum end caps.

**OPTICS**

Extruded High Transmission Milky Acrylic Lens with No LED imaging. Extruded High Transmission Frosted Acrylic Lens with LED imaging.

**ELECTRICAL**

Fixture comes reassembled with 8" whip.

All Drivers are installed in remote location.

All drivers are Universal input 120-277 VAC.

Standard Constant Current drivers include 0-10V dimming preinstalled in enclosure.





**LABELS**

Conforms To UL STD 2108 Certified To CSA STD C22.2 # 250.0


Suitable for Dry or Damp Locations, indoor use only.

ETL Control # 5011600

## Mounting Clips

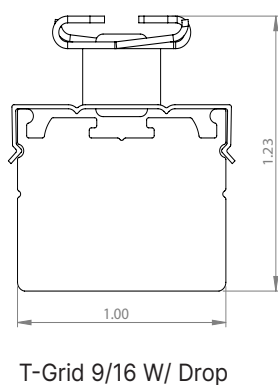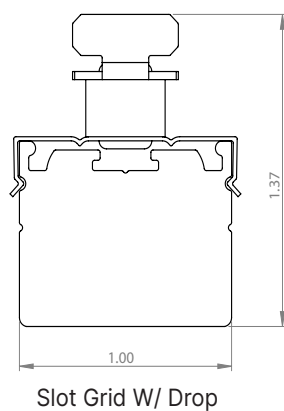

## Feed Points

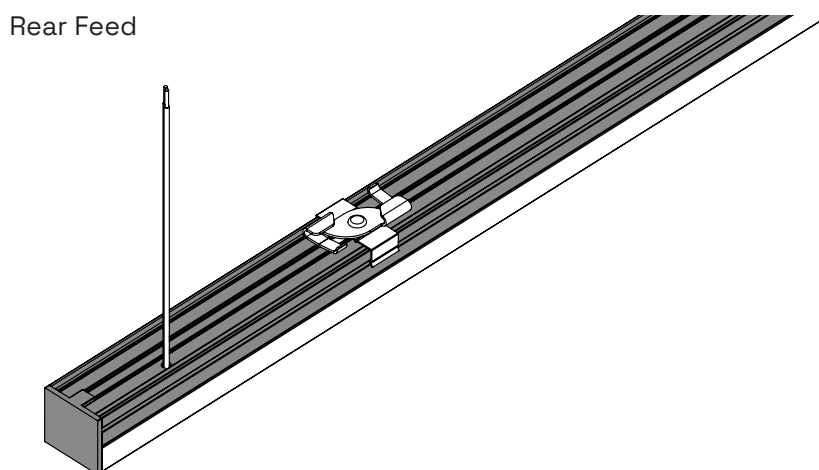

## Patterns

