




**SCOUT LIGHTING**  
Designed - Built - Shipped - New York

## 100 WATT 0-10 LED DRIVER

**PART #SDRVCC010100**

Project : \_\_\_\_\_ Firm : \_\_\_\_\_ Type : \_\_\_\_\_ Quantity: \_\_\_\_\_

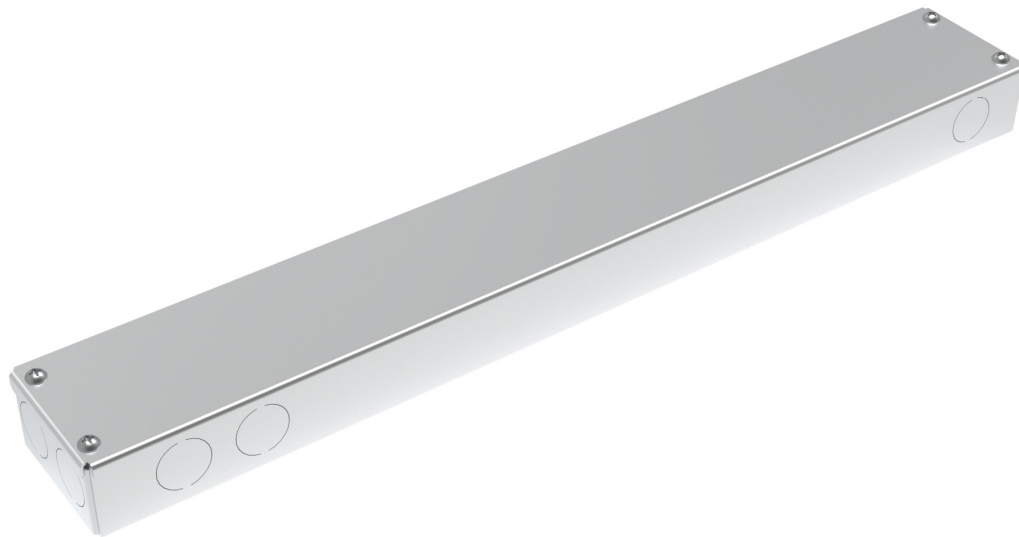

### Quick Specs

Driver Type	Constant Current
Dimming Control	0-10 : 0.1%
# of Channels	1
DC Voltage Range	30-50 VDC
AC Input Voltage	120 - 277
Class	2
mA	2000
Wattage	100
Warranty	5 years
Efficiency	>90%

### Max Load (2000mA)

Super Low (50mA)	40 Feet
Low (89mA)	22 Feet
Medium (149mA)	13 Feet
High (250mA)	8 Feet
Super High (300mA)	5 Feet

### Max Distance

20 AWG	20 Feet
18 AWG	40 Feet
16 AWG	60 Feet
14 AWG	100 Feet
12 AWG	150 Feet






**SCOUT LIGHTING**  
Designed - Built - Shipped - New York


## 100 WATT 0-10 LED DRIVER

**PART #SDRVCC010100**

### Driver Anatomy

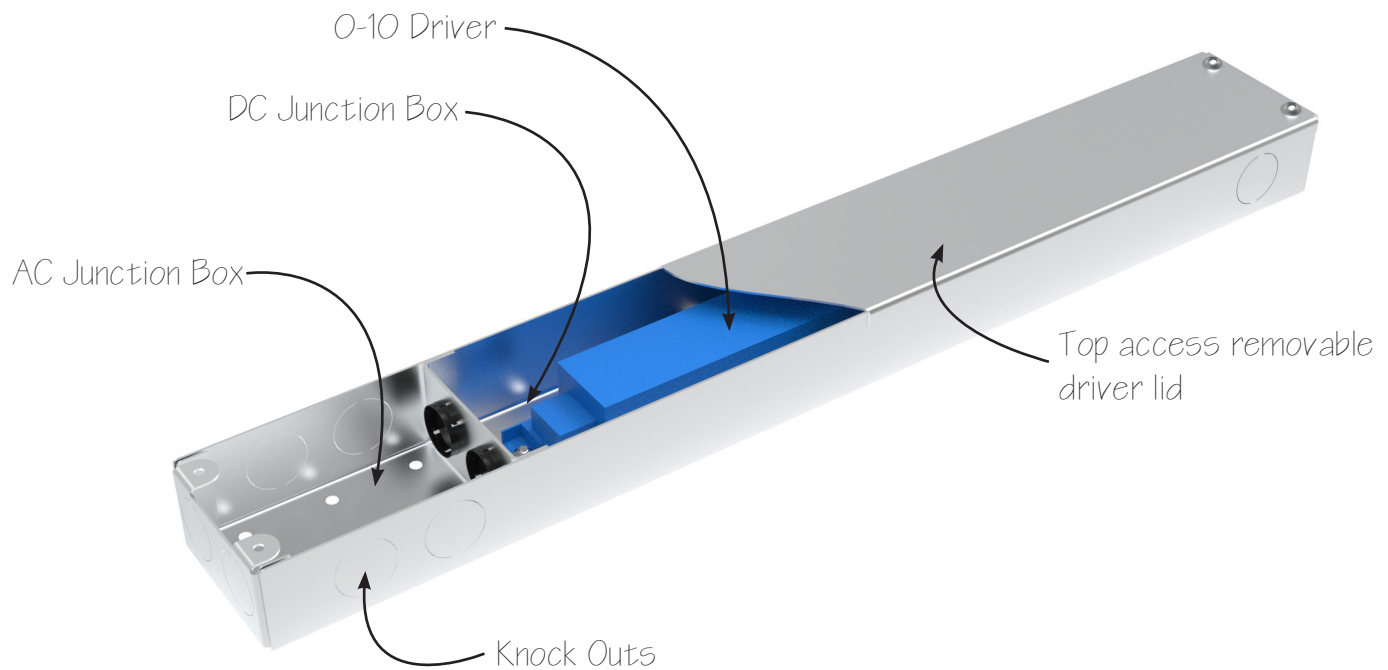

### Dimensions

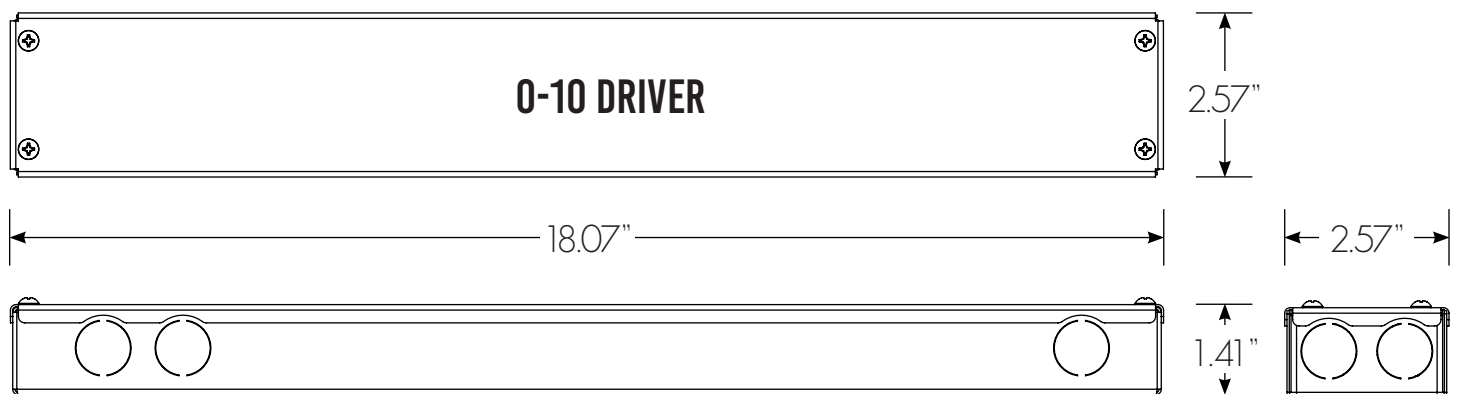

Scout Lighting reserves the right to modify this specification without prior notice. Updated 10/02/21.

New York, NY  
1.833.SCOUTLD  
[www.ScoutLighting.com](http://www.ScoutLighting.com)  
[Info@ScoutLighting.com](mailto:Info@ScoutLighting.com)






**SCOUT LIGHTING**  
Designed - Built - Shipped - New York


# 100 WATT 0-10 LED DRIVER

PART #SDRVCC010100


## Wiring

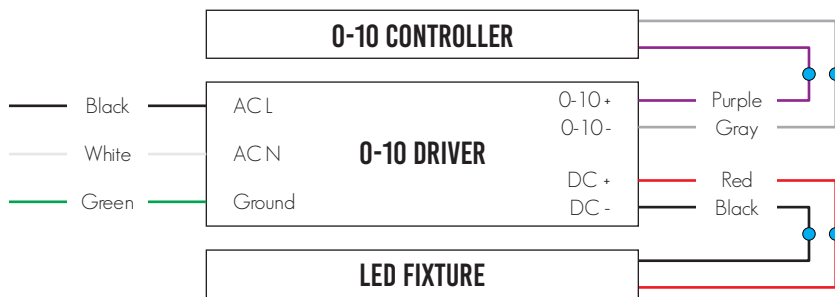

Single 0-10 wiring

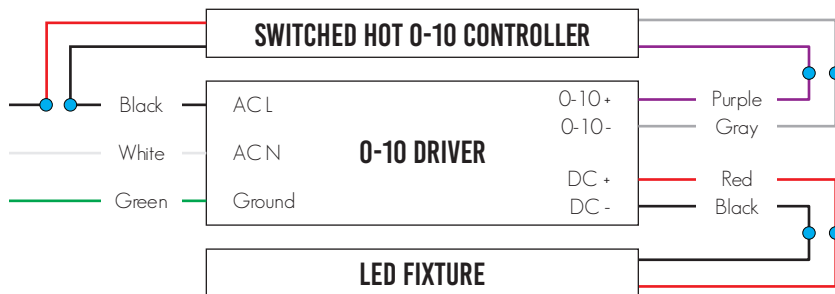

Switched Hot 0-10 Wiring

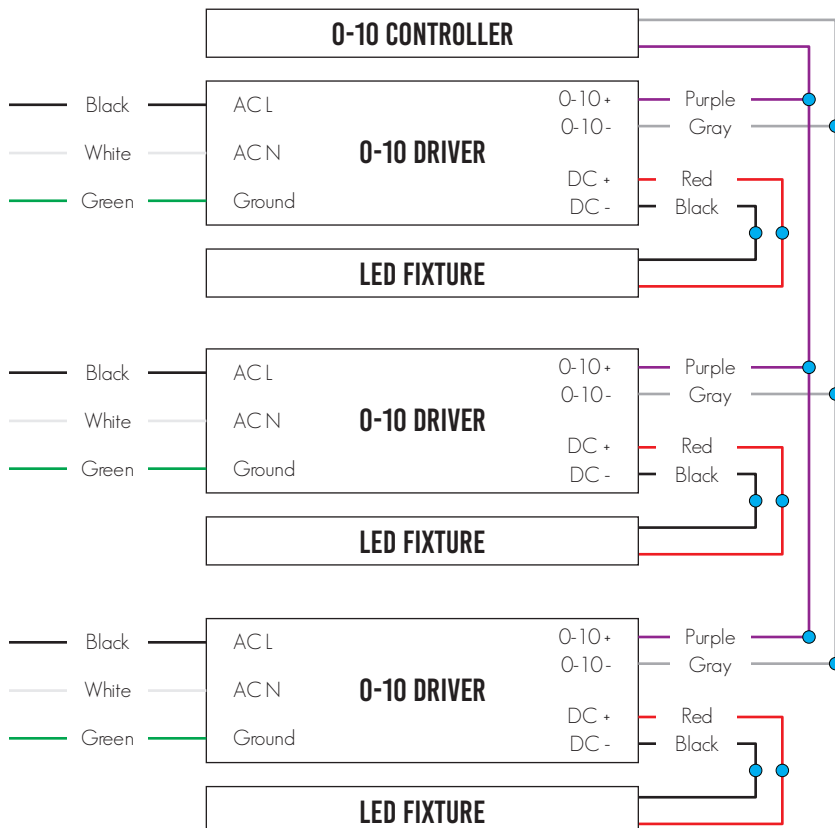

Multiple fixture wiring  
to single 0-10 Dimmer



### Constant Current Electronic 0-10V Dimmable Programmable LED Driver

P/N: AFLEX- 

The AFLEX Linear platform offers the unparalleled ability to program the drivers power in addition to the output current, dimming curve, dim-to-off functionality, NTC settings and more all while maintaining high efficiency over the programmable range. This unique technological advancement enables both ultimate design flexibility and significant SKU elimination. Programming the driver does not require any power and can be done in less than one second. The available auxiliary output provides a power source for sensors and/or cooling devices, eliminating the need for an additional power supply. The AFLEX driver is dimmable down to 0.1% with a 0-10V dimmer. Unequaled flexibility and performance along with Class P approval and Title 24 compliance makes the AFLEX driver the perfect choice for any commercial lighting fixture application. Title 24 compliance is dependant on dimmer luminaire combination.

**Installation:** Terminal Blocks with Side Feed

**Driver Type:** Class 2 Single Channel

**Dimming:** 0-10V Dimmable Down to 0.1% with Dim-to-Off Capability

**Input Voltage:** Universal 120VAC to 277VAC, 50/60Hz

**Output Voltage:** 3 - 57VDC

**Output Current:** 100 - 2000mA (1mA Step Programmable)


**Environmental:** Dry

**IP Rating:** IP40

**Listing:** UL Listed, Class P, Class 2

**Certifications:** UL8750 | CSA C22.2 No. 250.13-17

**Warranty:** 5-Year warranty

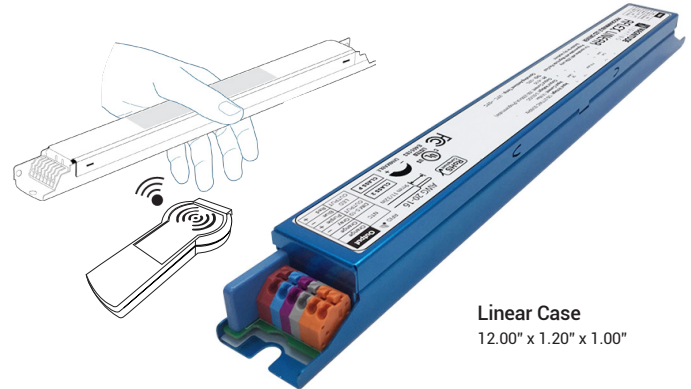

Linear Case  
12.00" x 1.20" x 1.00"



**DIM DOWN TO 0.1%**

**120 - 277VAC**

**100 - 2000mA**

**CLASS 2**

**IP40**



**CLASS P**



**RoHS Compliant**



#### Wireless Programmable Features

- Programmable Power 30 to 100W
- Output Current (1mA Step Programmable)
- Dimming Curve (Linear / Logarithmic)
- Dim-to-Off (On / Off)
- NTC Settings





#### AFLEX SERIES is also available in:

- AFLEX Compact
- JB SERIES


Refer to [Magnitudeinc.com](http://Magnitudeinc.com) for more details.

### Ordering Guide Default: AFLEX-100W-1650-L-LE

AFLEX - W - - L -

TYPE	MAX POWER	OUTPUT CURRENT	CASE STYLE	DIMMING CURVE	AUX POWER OPTION	'Default Setting Unless Specified Otherwise
AFLEX - AFLEX	30 to 100W - 30 to 100W Programmable	100 to 2000mA	Linear Enclosure Only	L - Linear (Std)	12V PS and 57V Output (Std)	
 PROGRAMMABLE Pre-Programmed per Chosen Specification	AFLEX - AFLEX 30W - 30W	100-1650 - 100-1650mA (3-57VDC)	L <sup>1</sup> - Linear enclosure	G - Logarithmic	E <sup>1</sup> - 12V PS and 57V Output	 Programming Requires FlexTool Wireless Programmer
	40W - 40W			L <sup>1</sup> - Linear	F - 24V PS and 57V Output	
	50W - 50W	100-2000 - 100-2000mA (3-50VDC)			G - No PS and 57V Output	
	60W - 60W				B - 12V PS and 50V Output	
	75W - 75W				C - 24V PS and 50V Output	
	100W - 100W				D - No PS and 50V Output	

DIMENSIONS	
LENGTH	12.00" (304.8mm)
WIDTH	1.20" (30.48mm)
HEIGHT	1.00" (25.4mm)



### Specifications - 1650mA Max Version

INPUT	
Input Voltage Range	120 - 277VAC $\pm$ 10%
Input Frequency	50 / 60Hz
Input Current	0.8A@120VAC / 0.4A@277VAC*
Inrush Current	38A Max
Efficiency	> 88% *
Power Factor	0.99@120VAC / 0.97@277VAC (Refer to graph on page 6)
OUTPUT	
Output Voltage Range	3 -57VDC*
Output Current Range	100 - 1650mA* (1mA step programmable)
Output Current Tolerance	$\pm$ 5%
Output Current Ripple	$\pm$ 5% @ Max load
Line Regulation	$\pm$ 0.5%
Load Regulation	$\pm$ 0.5%
Turn On Delay Time	0.4 sec @ Max load
Sensor Power Supply (Aux)	12 - 25V up to 160mA (Programmable)*
Stand-By Power	>1W
ENVIRONMENTAL	
Env. Protection Rating	IP40
Surge Protection	2.5kV
Operating Ambient Temperature	-40°C - +60°C
Operating Temperature	-40°C - +75°C
Storage Temperature	-40°C - +85°C
Expected Lifetime	50k hours at 75°C (Refer to graph on page 7)
Audible Noise	< 24dB Class A
Withstanding Voltage	2.5kV

\* Depending on model

DIMMING	
Dimming Control	0-10V
Dimming Input Range	-2 to +15V
Dimming Curves	Linear / Logarithmic (Programmable)
Min. Dimming Level	Dim down to 0.1%
Dim to off	Yes (Programmable)
Current Consumption	0.35mA / Source
LED THERMAL PROTECTION (NTC)	
NTC Value (Manufacture: Vishay)	15 k $\Omega$ $\pm$ 5% @25°C P/N: NTC0805E3153JMT
Output Level Range	1mA step programmable (0 - 100%)
PROTECTION	
Over Current Protection	Yes; Current limiting
Short Circuit Protection	Yes; Hiccup mode
Over Voltage Protection	Yes; Hiccup mode
Over Temperature Protection	Yes; Power derating (Refer to graph on page 7)
Mis-Wiring Protection	Yes; Auto shutdown
MECHANICAL HOUSING	
Length	12.00" (304.8mm)
Mounting Length	11.70" (296.8mm)
Width	1.20" (30.48mm)
Height	1.00" (25.4mm)
Housing Material	Aluminum
Housing Color	Blue Anodized
Junction Box	No
Input Connector Types	Black & White / Wago 253, Dual side / 16-20AWG strip 3/8"
Output Connector Types	Red & Blue / Wago 253, Dual side / 16-20AWG strip 3/8"
Dimming Connector Types	Purple & Grey / Wago 253, Dual side / 16-20AWG strip 3/8"
Auxiliary Connector Types	Yellow & Gray / Wago 253, Dual side / 16-20AWG strip 3/8"
NTC Connector Types	Orange & Orange / Wago 253, Dual side / 16-20AWG strip 3/8"
Mounting	Two half hole flange mount
APPROVAL MARKINGS	
Certificates / Approval Signs	UL 8750 Class 2, Class P


### Specifications - 2000mA Max Version

INPUT	
Input Voltage Range	120 - 277VAC $\pm$ 10%
Input Frequency	50 / 60Hz
Input Current	0.8A@120VAC / 0.4A@277VAC*
Inrush Current	38A Max
Efficiency	> 88% *
Power Factor	0.99@120VAC / 0.97@277VAC (Refer to graph on page 6)
OUTPUT	
Output Voltage Range	3 -50VDC*
Output Current Range	100 - 2000mA* (1mA step programmable)
Output Current Tolerance	$\pm$ 5%
Output Current Ripple	$\pm$ 5% @ Max load
Line Regulation	$\pm$ 0.5%
Load Regulation	$\pm$ 0.5%
Turn On Delay Time	0.4 sec @ Max load
Sensor Power Supply (Aux)	12 - 25V up to 160mA (Programmable)*
Stand-By Power	>1W
ENVIRONMENTAL	
Env. Protection Rating	IP40
Surge Protection	2.5kV
Operating Ambient Temperature	-40°C - +60°C
Operating Temperature	-40°C - +75°C
Storage Temperature	-40°C - +85°C
Expected Lifetime	50k hours at 75°C (Refer to graph on page 7)
Audible Noise	< 24dB Class A
Withstanding Voltage	2.5kV

\* Depending on model


DIMMING	
Dimming Control	0-10V
Dimming Input Range	-2 to +15V
Dimming Curves	Linear / Logarithmic (Programmable)
Min. Dimming Level	Dim down to 0.1%
Dim to off	Yes (Programmable)
Current Consumption	0.35mA / Source
LED THERMAL PROTECTION (NTC)	
NTC Value (Manufacture: Vishay)	15 k $\Omega$ $\pm$ 5% @25°C P/N: NTCS0805E3153JMT
Output Level Range	1mA step programmable (0 - 100%)
PROTECTION	
Over Current Protection	Yes; Current limiting
Short Circuit Protection	Yes; Hiccup mode
Over Voltage Protection	Yes; Hiccup mode
Over Temperature Protection	Yes; Power derating (Refer to graph on page 7)
Mis-Wiring Protection	Yes; Auto shutdown
MECHANICAL HOUSING	
Length	12.00" (304.8mm)
Mounting Length	11.70" (296.8mm)
Width	1.20" (30.48mm)
Height	1.00" (25.4mm)
Housing Material	Aluminum
Housing Color	Blue Anodized
Junction Box	No
Input Connector Types	Black & White / Wago 253, Dual side / 16-20AWG strip 3/8"
Output Connector Types	Red & Blue / Wago 253, Dual side / 16-20AWG strip 3/8"
Dimming Connector Types	Purple & Grey / Wago 253, Dual side / 16-20AWG strip 3/8"
Auxiliary Connector Types	Yellow & Gray / Wago 253, Dual side / 16-20AWG strip 3/8"
NTC Connector Types	Orange & Orange / Wago 253, Dual side / 16-20AWG strip 3/8"
Mounting	Two half hole flange mount
APPROVAL MARKINGS	
Certificates / Approval Signs	UL 8750 Class 2, Class P

### Mechanical Diagram (Linear Case)

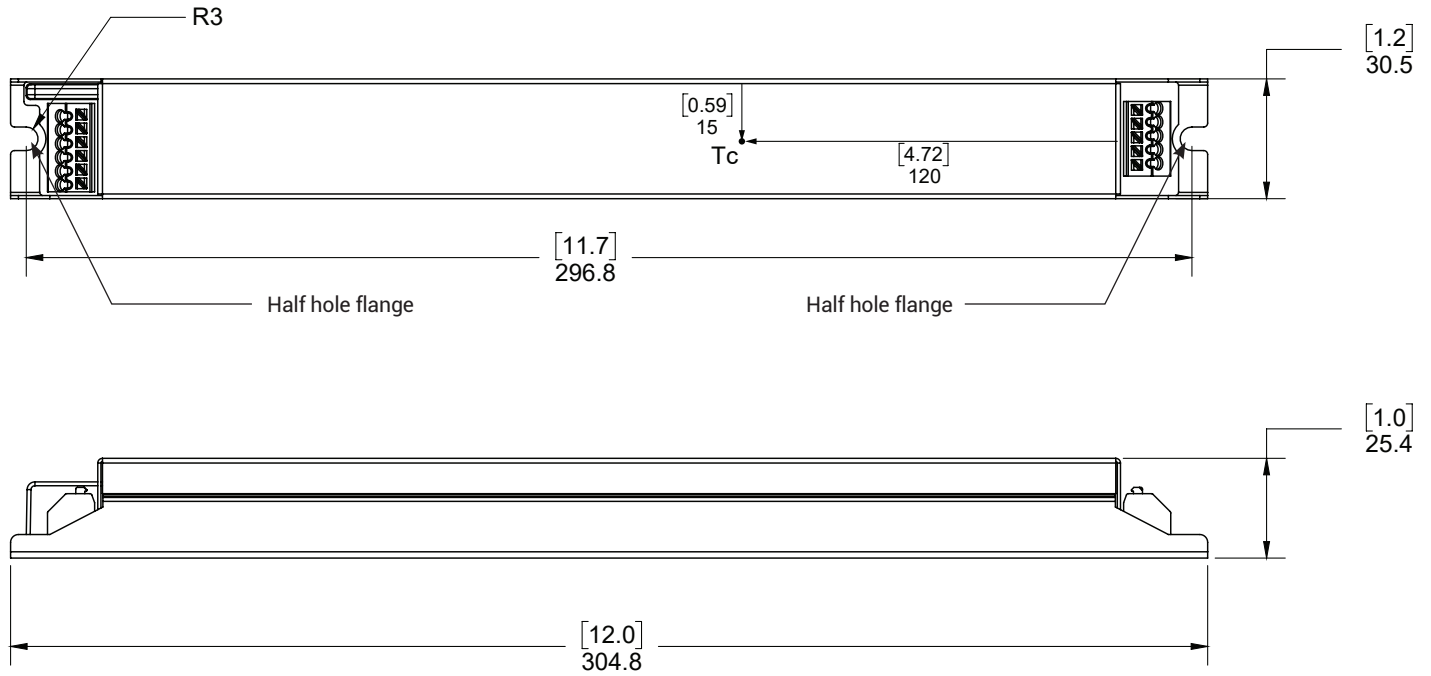

### Flicker Performance (1650mA 3-57VDC)


The IEEE P1789 flicker test results are presented graphically with no observable effect (green area), low-risk (yellow area), and high risk (red area).

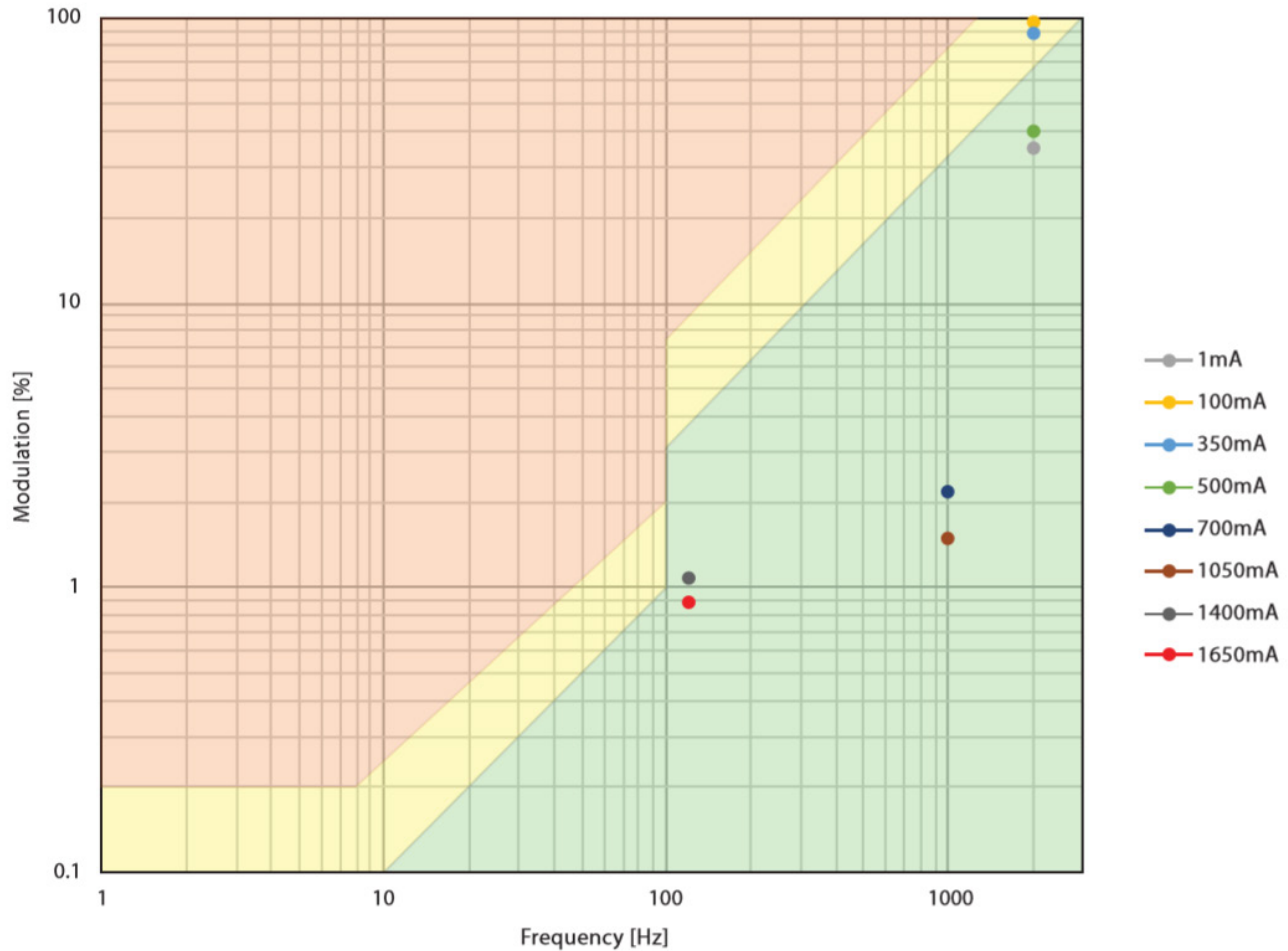




### Flicker Performance (2000mA 3-50VDC)


The IEEE P1789 flicker test results are presented graphically with no observable effect (green area), low-risk (yellow area), and high risk (red area).

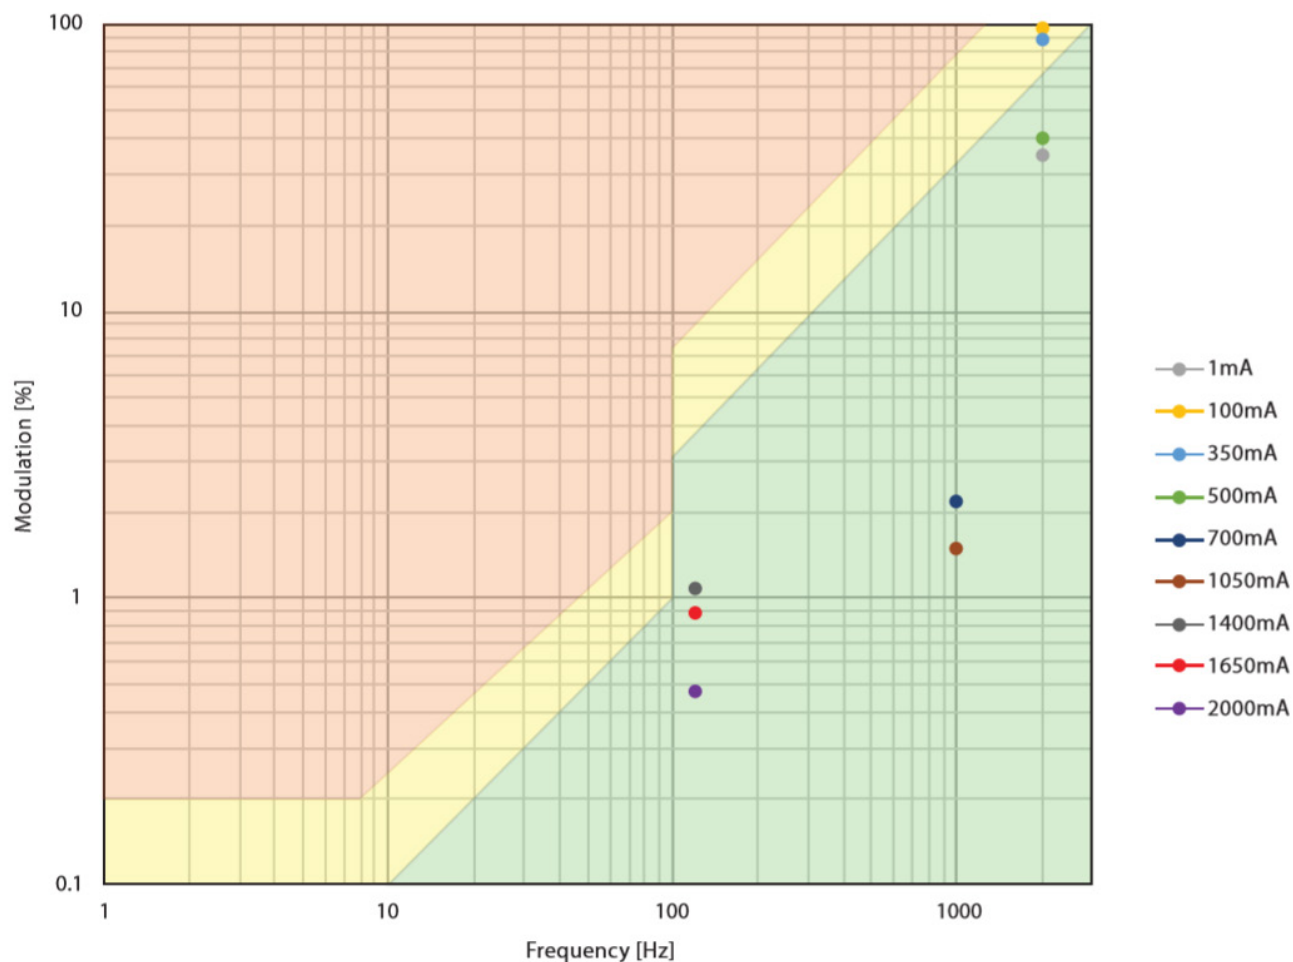


OPERATING RANGE

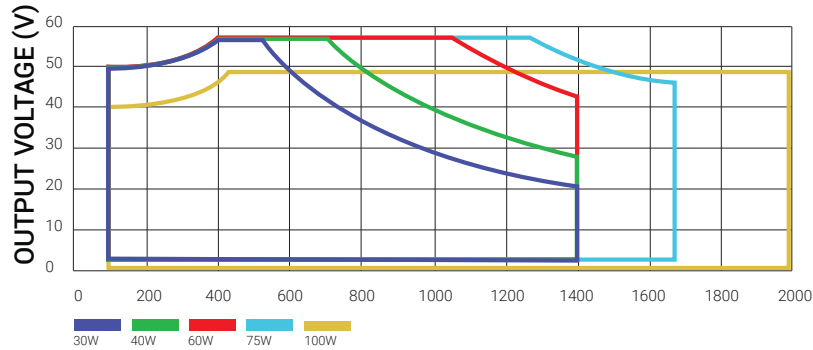


OUTPUT CURRENT (mA)  
DIMMING CURVES

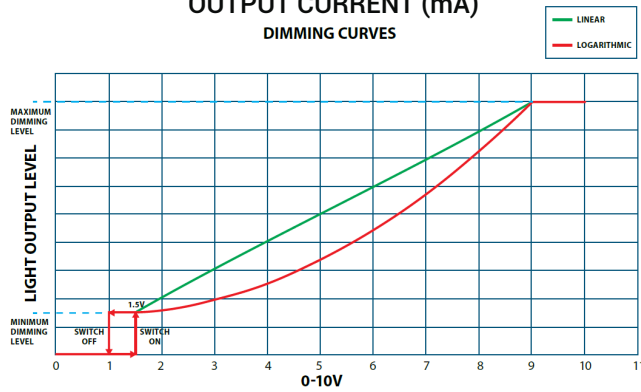


EFFICIENCY vs OUTPUT VOLTAGE (120VAC)

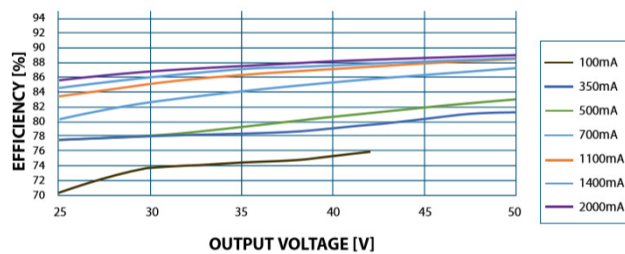


EFFICIENCY vs OUTPUT VOLTAGE (277VAC)

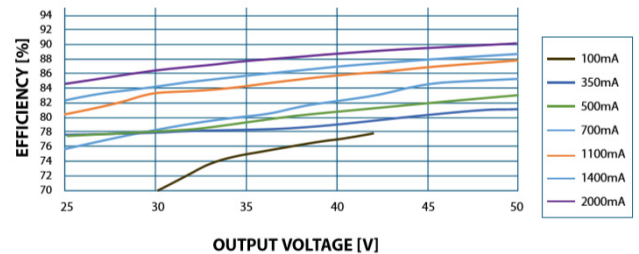

POWER FACTOR vs OUTPUT POWER

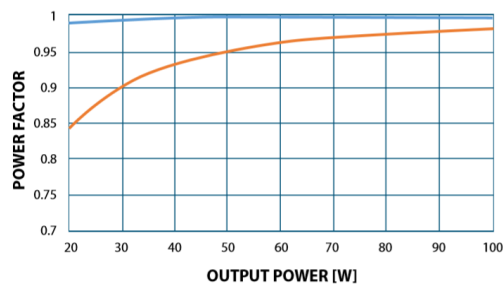


THD vs OUTPUT POWER

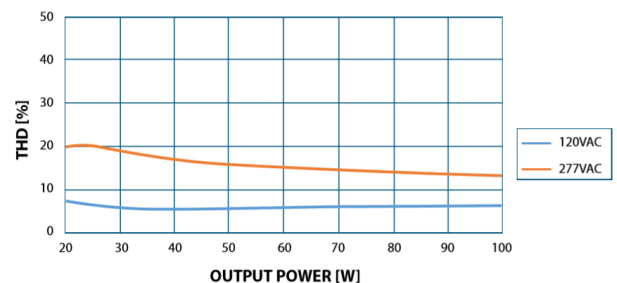

### LED Thermal Protection (NTC)


AFLEX Series drivers help protect the LED's lifetime and will reduce LED temperature by derating the output current in case of high temperatures. The negative temperature coefficient (NTC) thermistor must be connected to the LED driver as shown in the wiring diagram.

For maximum performance, the NTC thermistor must be placed close to the Tc point of the LED module. The power derating parameters can be programmed using the FlexTool programmer. The NTC outputs can be left disconnected if thermal protection is not required.


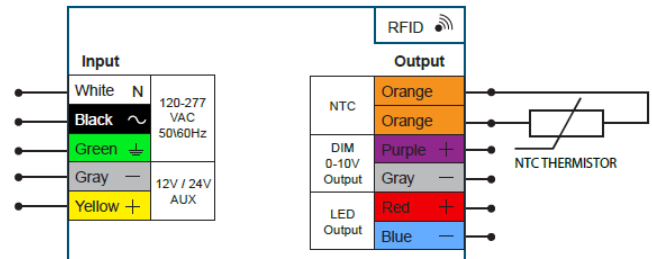


### Compatible NTC Thermistor

SPECIFICATION	MANUFACTURER	MANUFACTURER P/N
15 kΩ ± 5% @ 25°C	Vishay	NTCS0805E3153JMT

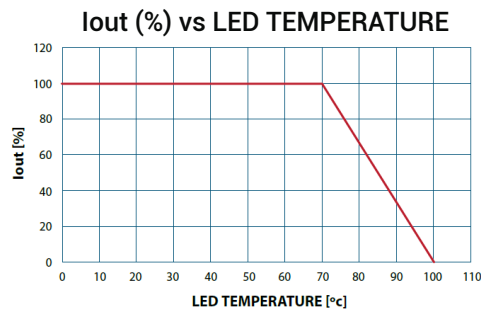


### Driver Thermal Protection

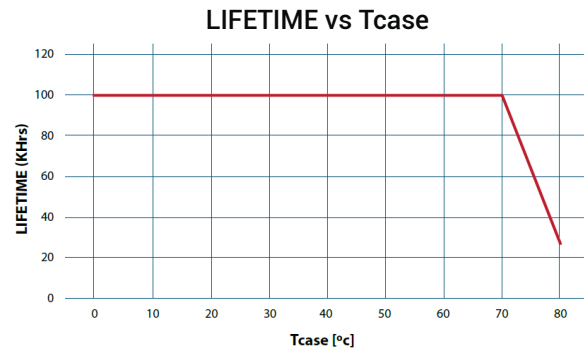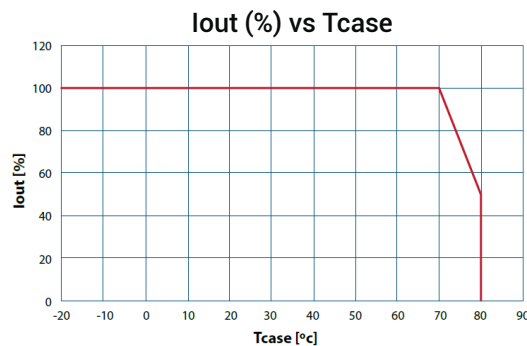

5% LED DROP ALLOWED				10% LED DROP ALLOWED				Normal Operation Derating Area Protection Area Resume operation after protection activated	MIN	MAX
AWG	100-700mA	700-1650mA	1500-2000mA	AWG	100-700mA	700-1650mA	1500-2000mA			
18	17ft	7ft	6ft	18	34ft	15ft	12ft			
16	27ft	12ft	9ft	16	53ft	23ft	19ft			
14	42ft	19ft	15ft	14	85ft	37ft	30ft			
12	67ft	36ft	24ft	12	135ft	59ft	47ft			


### Inrush Current

VIN (V)	IPEAK (A)	T (@50% IPEAK)
120VAC	14.2	1.5 usec
277VAC	38	1.2 usec

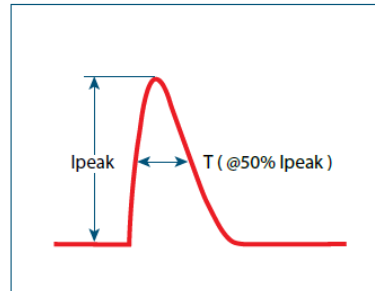

### Remote Installation

#### OUTPUT CURRENT vs LED VOLTAGE

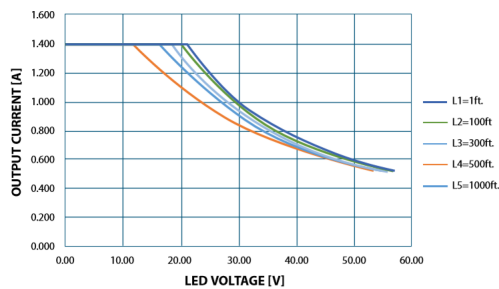

#### TEST CONDITION:

1. Output Power = 100W
2. Output Current = 2A
3. Wire parameters = 18AWG, 16/ 30, 6.75Ω/ 1000'

**Note - Above L=100ft. min LED voltage = 10V**

### Compatible 0-10V Dimmers


Refer to [MagnitudeInc.com](http://MagnitudeInc.com) for compatability information.

## FLEXTOOL

### Programming the AFLEX Driver

The FlexTool wireless programmer used to program Magnitude's Flex Series of LED Drivers. By using the FlexTool, OEM's can quickly and smoothly configure the drivers parameters without applying power or wires to the driver.

With the FlexTool software you can easily save driver configuration profiles externally and use as needed. The software provides graphic and audio indication that the driver was successfully configured.

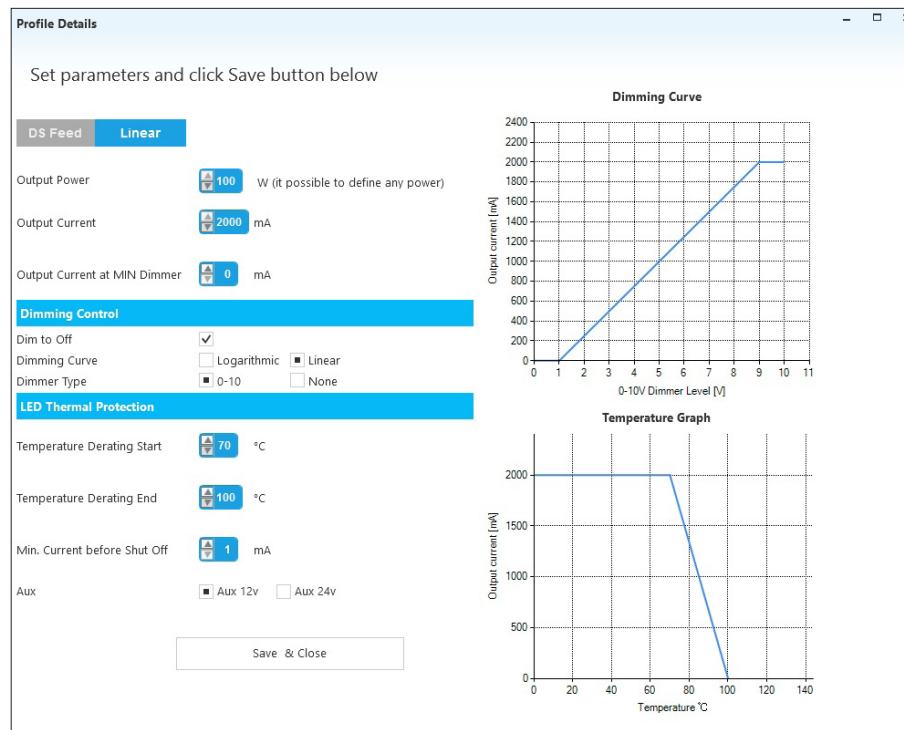

### Programmable Output Current and Power

Current programmable in 1mA steps. Power programmable in 1W steps.

### Dimming Control

- Dim to Off: Yes/No (check box) Factory Default: Yes
- Dimming Curve: Linear or Log. Factory Default: Linear
- Min. Dimming level before Dim to Off
- Factory default 1mA
- Dimming Type: 0-10V / None. Factory Default: 0-10V

### LED Thermal Protection

- Temperature Derating start. Factory Default: 70°C
- Temperature Derating end. Factory Default: 100°C
- Minimum Current Level Before Shutoff: 1mA

