



**SCOUT LIGHTING**  
Designed - Built - Shipped - New York

## 50 WATT 0-10 LED DRIVER

**PART #SDRVCC01050-TW**

Project : \_\_\_\_\_ Firm : \_\_\_\_\_ Type : \_\_\_\_\_ Quantity: \_\_\_\_\_



### Quick Specs

Driver Type	Constant Current
Dimming Control	0-10
# of Channels	2
DC Voltage Range	8-55 VDC
AC Input Voltage	90 - 305
Class	2
mA	200 - 1500
Wattage	50
Warranty	5 years
Efficiency	>90%

### Max Load (1500mA)

Super Low (50mA)	30 Feet
Low (89mA)	16 Feet
Medium (149mA)	10 Feet
High (250mA)	6 Feet
Super High (300mA)	5 Feet

### Max Distance

20 AWG	20 Feet
18 AWG	40 Feet
16 AWG	60 Feet
14 AWG	100 Feet
12 AWG	150 Feet






**SCOUT LIGHTING**  
Designed - Built - Shipped - New York


**50 WATT 0-10 LED DRIVER**

**PART #SDRVCC01050-TW**

## Driver Anatomy

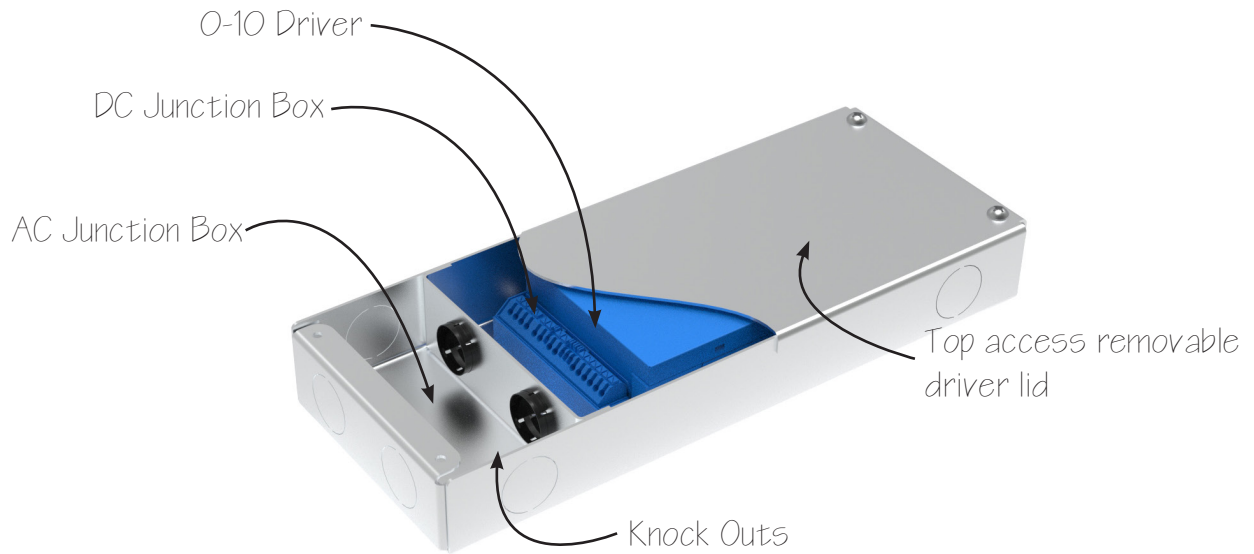

## Dimensions

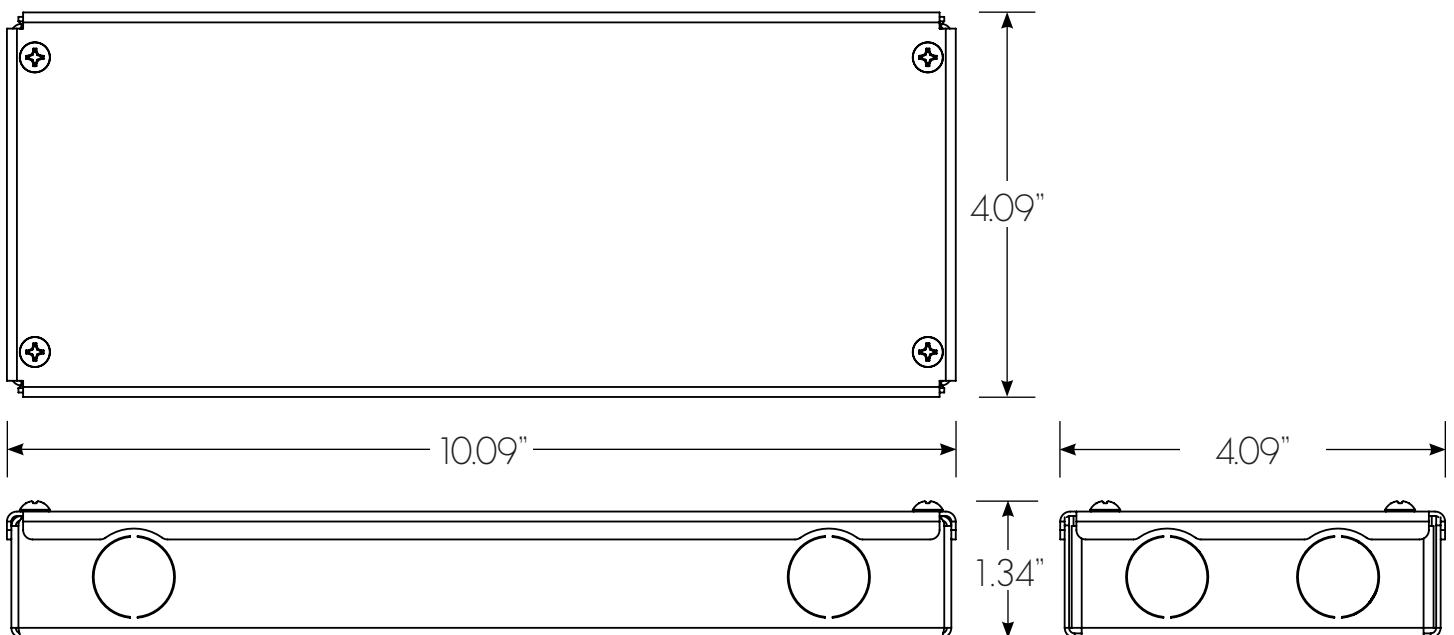



Scout Lighting reserves the right to modify this specification without prior notice. Updated 10/02/21.

New York, NY  
1.833.SCOUTLD  
www.ScoutLighting.com  
Info@ScoutLighting.com






## 0-10 Wiring

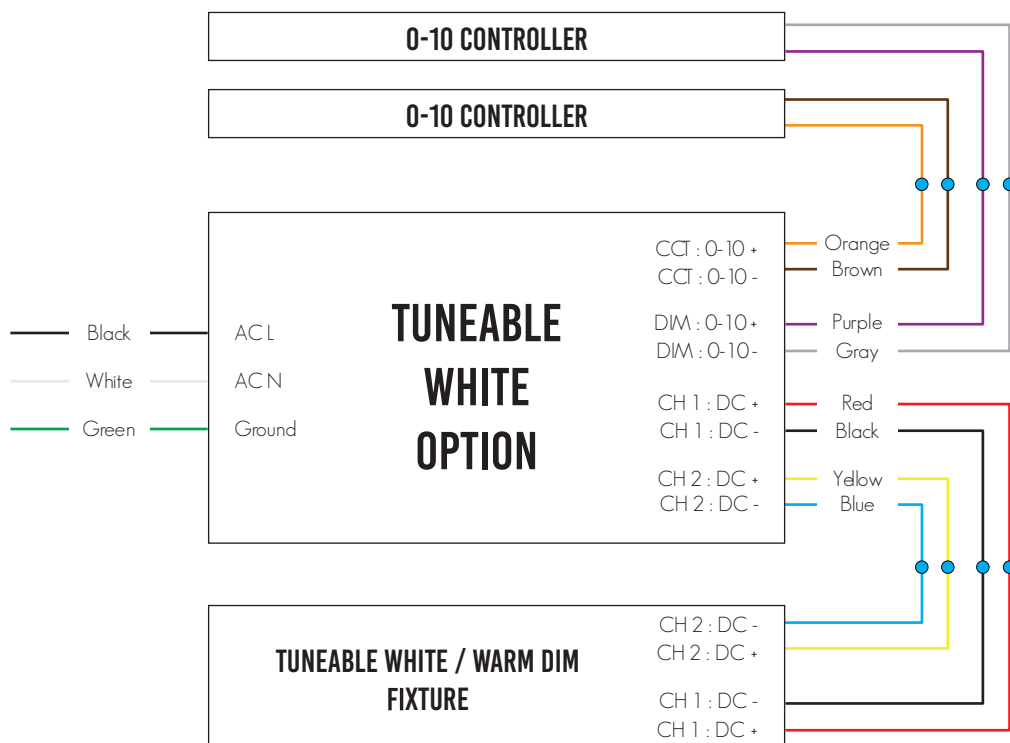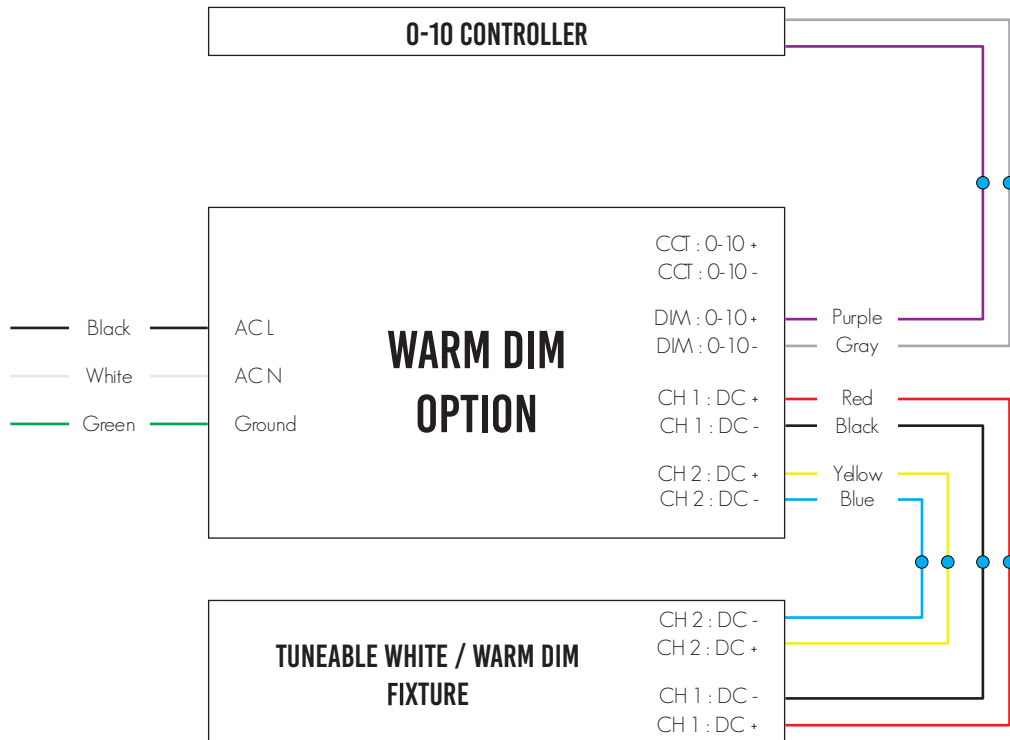

# S Series Intelligent LED Driver

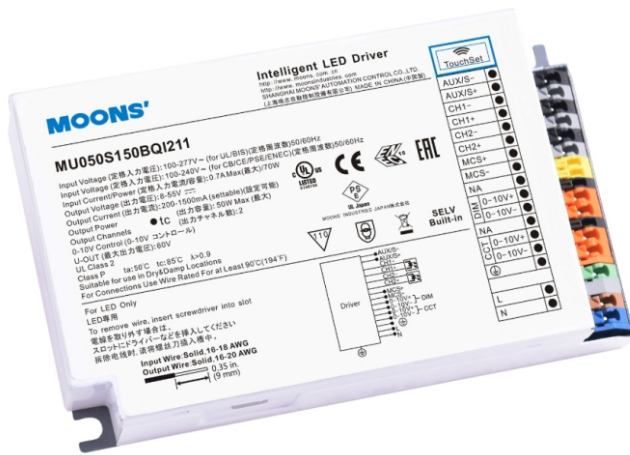

**0.1% Deep Dimming**  
**Tunable White**  
**Human Centric Lighting**

**Flicker Free**

**Meet:**

**CEC title 24 JA8 & JA10**

**IEEE PAR 1789-2015**

## ■ 50W S Series-Dual Channels LED Driver- MU050S150BQI211

MOONS' 50W S Series Dual Channels LED Drivers are designed for Human Centric Lighting and Tunable White application, mixed two channels achieve smoothest color temperature tuning and brightness dimming due to 0.1% deep dimming character, which let human feel like sunlight and moonlight. Fit with various application thanks to driver's various function, such as programmable parameters, different outline, optional dimming strategy, etc.

## ■ Main Characteristics

- Dual Channels, constant current driver
- Programmable operation window
- 0.1% Dimming & 65536 Dimming Steps
- Standby power<0.5W
- Integrated 12Vdc/100mA auxiliary power supply
- 2 channels isolated 0-10V control
- 4 in 1: Tunable White(1500-6500K), Dim to Warm(1500-3200K), solo dimming, dual dimming
- 50W Max each channel with total 50W load
- Flicker free for whole operation range

## ■ Benefits

- Application-oriented operating window for maximum compatibility
- Independent two channels for Tunable White application
- Ready for Zhaga book 18/low voltage power
- Common anode design for higher output current

## ■ Applications

- Office, Architecture, Education, Healthcare, Smart home

■ Compliance and Certification

- Comply with UL Class2
- UL, CE, ENEC, EAC, PSE safety approval

■ Electrical Specifications

Input	Efficiency (230Vac)	87% (Typical)
	Efficiency (100Vac)	86.5% (Typical)
	Voltage Range (Vac)	90~305
	Rated Input Voltage (Vac)	100~277
	Frequency Range (Hz)	50/60
	Power Factor	>0.9 @ 100~277Vac 50/60Hz input, with 50%~100% load conditions
	THD	<20% @ 100~277Vac 50/60Hz input, with 50%~100% load conditions
	AC Current (Typical)	0.7A Max @ 100Vac, 0.3A Max @ 230Vac
	Inrush Current (Typical)	<10A @ 100~277Vac input, 25°C cold start and 100% load conditions
	Input Power (W)	66 (Max)
	Standby Power (W)	<0.5W @ 100V/60Hz, 230V/50Hz, 277V/60Hz
	Leakage Current (Max)	0.75mA Max @ 277Vac 60Hz input
Output	Output Voltage Range (V)	8~55
	Output Current Range (mA)	200~1500
	Rated Power (W)	50 (Max)
	Output Channel Number	2 or 1
	Ripple Current (PK-PK)/AV	20% Max @ output 300~1500mA conditions
	Current Tolerance	±5% @ setting current 200~1500mA
	Line Regulation	±1%
	Load Regulation	±3%
	Startup Time	<0.5S @ 100V/230V/277V
Auxiliary Output	Output Voltage	12Vdc (±5%) @ operation range
	Operation Range	0~100mA
Dimming Port	0-10V Dimming	Output current≤1mA
	0-10V Dimming	Isolated 0~10V dimming 0.1%~100%, optional dimming curve: logarithmic/linear
Protection	Open Circuit Protection (V)	58.5
	Short Circuit	Automatic recovery
	Over Temperature	Automatic recovery
Environment	Operating Temperature	-25~50°C
	Operating Humidity	20~95%RH, non-condensing
	Storage Temperature	-40~85°C
	Storage Humidity	10~95%RH
	Vibration	10/500Hz, 5G 12min/cycle, period for 72min each along X、Y、Z axis
	Ingress Protection Rating	IP20
Safety & EMC	Safety Standard	UL8750, UL1310 Class 2, CAN/CSA-C22.2NO.107.1-01, EN61347-1, EN61347-2-13
	EMC Emission	FCC Part 15 ClassB, EN55015, EN61000-3-2 ClassC, EN61000-3-3
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge L, N-FG: 2.5KV, L-N: 2.5KV)
Others	Lifetime	>50000 hours @ Tc=70°C and 100% load conditions
	MTBF	500,000 hours, measured at full load, 25°C ambient temperature SR-332 Issue 3
	Dimension (L x W x H mm)	130 x 76 x 30
	Weight	375g

Connector Layout



AUX±

i. The AUX circuit is isolated from primary (input) circuit and dimming circuit, but not isolated from secondary (output) circuit.

0-10V±

- i. The dimming circuit is isolated from primary (input) circuit and secondary (output) circuit .
- ii. Tunable White uses two signals to control two outputs to achieve color temperature and intensity changing on CCT lamp. Dim to Warm dims like incandescent light bulb, only use one 0-10V signal to control two outputs to achieve that CCT value follow lamp's Intensity. 0-10V Dual dims like unicast dimming, use two signals to control two outputs respectively. 0-10V Solo dims like broadcast dimming, use one signal to control two outputs simultaneously.
- iii. Maximum communication cable length

Table with 5 columns: Material, Area mm², AWG, and Maximum cable length (meter) at 25°C, 50°C, and 75°C. Data rows for Copper with areas 0.5, 0.75, 1, and 1.5 mm².

iv. Standby power <0.5W only if set dim level 0 and disable AUX.

MCS±

- i. MCS+/- interface voltage 5V
- ii. Could connect to external NTC
NTC thermal management protects LED lamp, when the temperature of LED lamp over temperature protection point, the current will be reduced by 50% every 5 minutes. Default setting is 85°C.




NTC compatibility list:

Table with 2 columns: NTC Manufacturer and NTC Model NO. Rows include MURATA (NCP21WB473J03RA), VISHAY (NTCS0805e4473JXT), and VISHAY (NTCLE100E3473).

- iii. The MCS terminal is to be used for factory programming and update of firmware program. Not for connecting to a control device to perform control function (except NTC thermistor).
- iv. Update firmware through MCS interface.

CH1±, CH2±

- i. General connection
- ii. Get larger output current through parallel connection
- iii. Support common anode connection

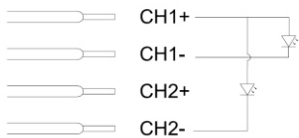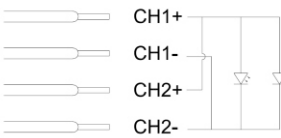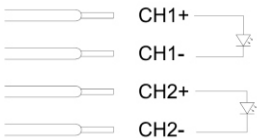

ii. Maximum LED wiring length (copper)

Table with 6 columns: Wire Value, AWG 20 (0.52 mm²), AWG 19 (0.57 mm²), AWG 18 (0.81 mm²), AWG 17 (1.03 mm²), and AWG 16 (1.32 mm²). Rows for Distance (m) with values 16, 18, 25, 32, and 41.

! Please observe voltage drop over cable lengths.
! Longer cable lengths increase EMI.


Dimming Performance

Flicker Free

- i. Meet: CEC title 24 JA8 & JA10, IEEE PAR 1789-2015
- ii. The product utilize driver and LED load 1 and 2 is compliant with CEC title 24 JA8 and IEEE PAR 1789-2015 Recommended Practice 1 in the dimming range from 5mA to 150mA.

Dimming Method

In the range of 200~1500mA, the current operates in continuous mode;
In the range of 0~200mA, the current operates in PWM dimming mode, and the PWM frequency 3.6KHZ.

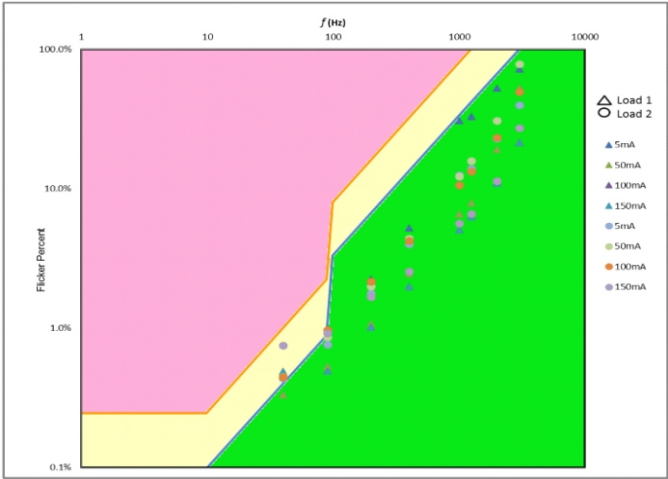

Porgrammable Performance

Touch Setting

Program driver's parameters without cable.

Download Software

Smartkey Network

Program driver's parameters through cable programming. Update driver's firmware.

Download Software

1mA Current Programmable Step

Default Factory Setting

Touch Setting V1.1.1.12

Load Save Read Write Setting

Current

Channel 1 350 mA

Channel 2 350 mA

General Setting

Dimming Strategy Tunable White

Dimming Curve Logarithmic

Minimum Dimming Level 0.1 %

NTC 85

AUX Power Enable

Input 0-10V Voltage Range: Upper 10.0 V Lower 1.0 V

Physical CCT Warmest 2700 K Coolest 6500 K


Logical CCT Warmest 2700 K Coolest 6500 K

Fade Time 300 ms

Inrush Current

Ipeak & Time

Input Voltage	Inrush Current Ipeak	Inrush Current Time, measured 50% of Ipeak
100VAC	3.5A	35us
220VAC	8A	35us
277VAC	9A	40us

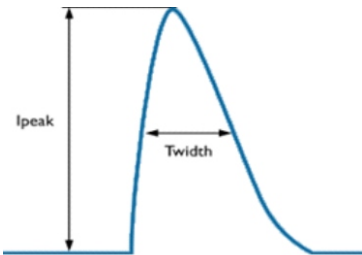


Automaitc Circuit Breakers


ACB Type	B10	B13	B16	B20	C10	C13	C16	C20
Number of LED Drivers @rated load	15	19	24	30	20	26	32	40

■ Curve


■ Derating Curve

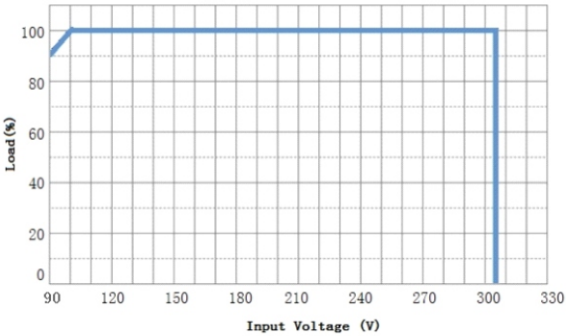


■ Derating Curve

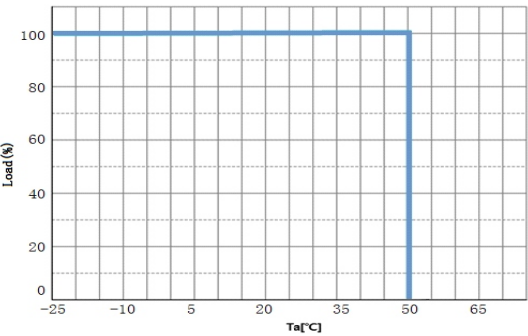


■ V/I Curve

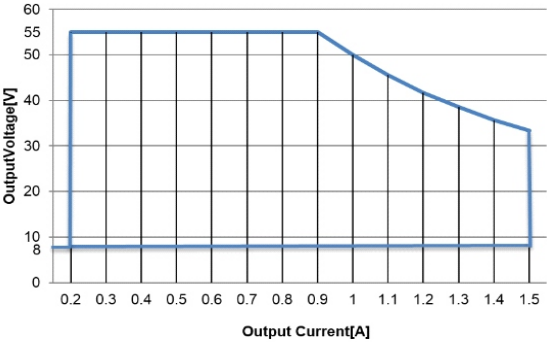

■ Lifetime Vs Tc

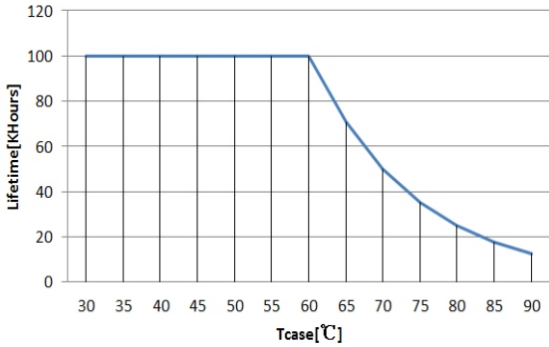


■ Dimming Curve

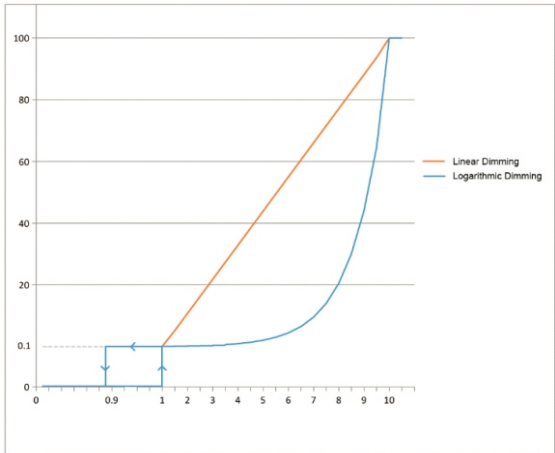




■ **Curve**


■ **PF VS Load Curve**

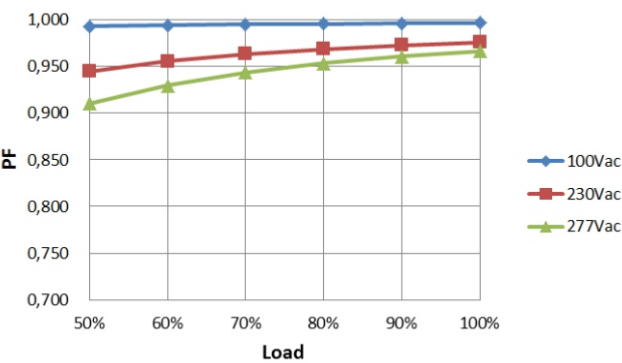

■ **THD VS Load Curve**

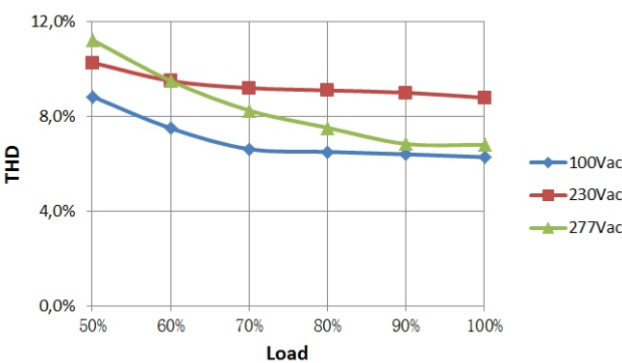


■ **Efficiency VS Load Curve**

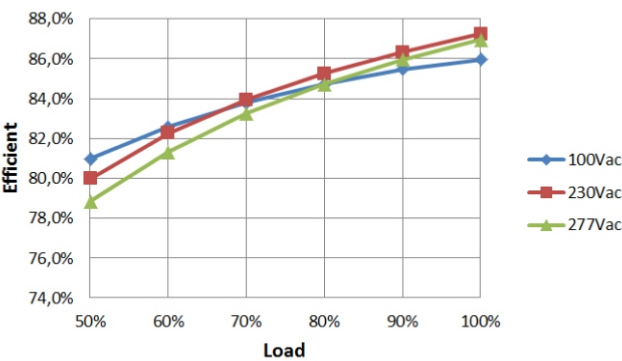


■ Mechanical Specification

■ Dimensions (Unit: mm)

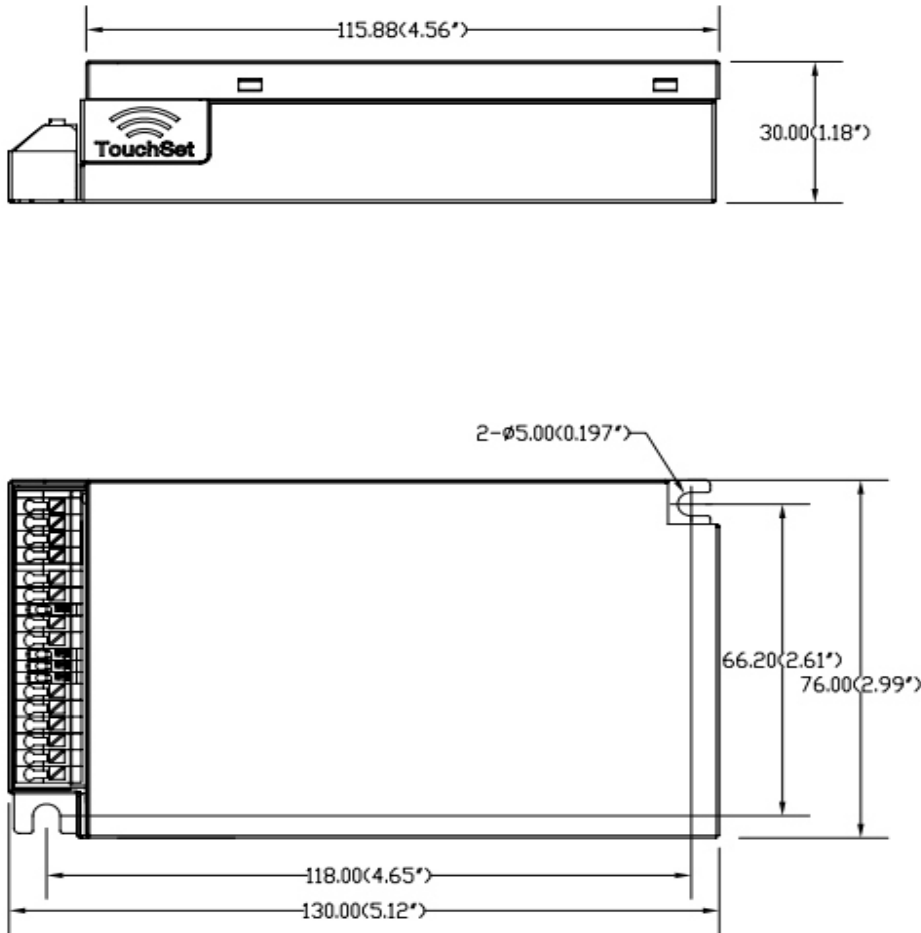

■ Ports

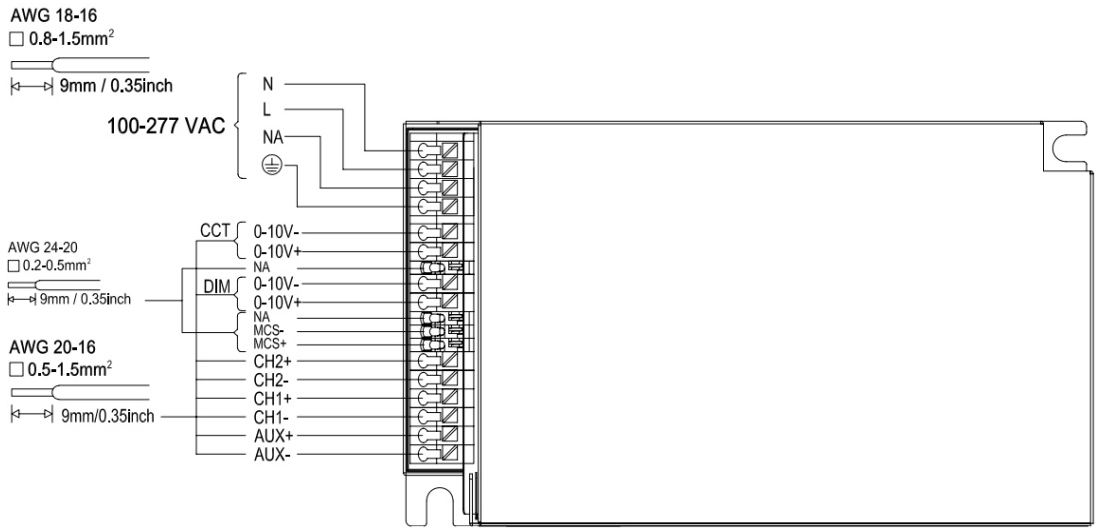

!These terminals are intended for both solid and stranded wire.  
!To remove wire, insert screwdriver into slot.

RoHS Compliance:  
Our products comply with the European Directive 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Date of release: 2019-10-14, Version A2