

Project: Firm: Type: Quantity:





AMERICAN MADE



#### WARRANTY

5 Years

#### **EFFICACY**

135 Lm / Wt

#### **MACADAM**

3 Step

CRI 90+

**R9** 50+

### **Applications**

- · Cove Lighting
- Under Cabinet
- Stair / Toe Kick
- Back Lighting
- · Vanity Lighting

## **Features**

- Fully Assembled
- Rigid Scout Engines
- · Cuttable to 1/2 Inch
- No Double sided tape
- · Shop drawings for all orders
- · Easy Plug and play system
- · LumenDial allows you to dial in any lumen output
- · Designed for the Contractor
- · Solderless Connections
- No Visible hot-spots ever (with milky lens)
- Illuminated Corners
- Endless runs Inject new power feeds at any point

2200	2700	3000	3500	4000	5000

### Part # Builder

SS-S +		+	+	+	+	+		+	+
Prefix +	Lens	+ Intensity 1	+ CCT	+ Finish <sup>2</sup>	+ Feed <sup>3</sup>	+ Control	+ Mount	+ Blind Cove <sup>4</sup>	+ Wire length <sup>5</sup>
Surface Fixture	OG10 Grazer 10x60	SL - Sup. Low L - Low M - Medium H - High SH - Sup. High LD - Lumen Dial	27 - 2700K 30 - 3000K 35 - 3500K	W -White B - Black Custom RAL #	EF - End RF - Rear SF1- Side 1 SF2- Side 2	0 - None 1 - 0-10 2 - DMX 3 - POE 4 - Phase 5 - Lutron Hi-Lume 1% EcoSystem w/ SO-FTB 6 - Lutron Hi Lume 1% 3 Wire+G 7- Lutron Hi Lume 1% Forward Phase 2-Wire 120V	115/16 - T Grid Int 15/16		12" 24" 48" 96" Custom

<sup>&</sup>lt;sup>1</sup> Lumenn Dial : Custom Output : The Scout Engines can be programmed for any lumen output from 1 to 1,400 lumens per foot. Contact Factory for more info.



<sup>&</sup>lt;sup>2</sup> Finish: Mill Finish comes standard. Cost Adder for Powder Coating. Contact Factory for Custom RAL#.

<sup>&</sup>lt;sup>3</sup> Feed: See Feed details on page 4

<sup>&</sup>lt;sup>4</sup>See Blind Cove details on page 5. <sup>5</sup> Wire Length: Standard 12"



## SCOUT RECOGNIZED 2021 IES PROGRESS REPORT



"Scout has released its Select Linear Accent Lighting Line as the first linear accent lighting product that is cuttable every  $\frac{1}{2}$ -inch with the ability to burn in a specific lumen and wattage output at time of assembly. The client is able to choose from 1 to 1400 lumens per linear foot. Their proprietary boards have low-profile male / female connectors and the engines are designed with side and rear feed points every inch." - IES Progress Report

## OUR PHILOSOPHY

At Scout, everything we do is driven by three simple philosophies:

- We do the job that needs to be done.
- If something isn't perfect we'll do it again, regardless of time.
- · We design what we love and love what we design.

We proudly stand on the front-line of the industry - taking risks to achieve superior and simpler product. **THIS IS THE WAY OF THE SCOUT.** 



## **LUMEN\_DIAL**

ANY LUMEN VALUE: BETWEEN 1 - 1,400 PER FOOT ANY WATTAGE: BETWEEN 0.1 - 10 PER FOOT DIALED IN TO YOUR SPECIFICATION

Scout's proprietary award-winning light engines have the ability to dial in any intensity or wattage you desire without changing a thing on the engine. We can guarantee you'll never have a hot spot or shadow again.



Designed • Built • Shipped

NFW YORK





## THE SCOUT ENGINES - THE HEART OF EVERY FIX





TUNEABLE WHITE



RGB WHITE

SCOUTS AWARD-WINNING RIGID ENGINES HAVE BEEN EXPANDED TO INCLUDE TUNEABLE WHITE AND RGBW



WHERE YOU NEED IT

Our propriety patented engines feature solderless connectors and low-profile male / female connectors, enabling simple snap-together installation. Throw in the ability to inject power from either side or the rear, and we can offer you limitless runs without ever having a break in your light.

PERFECT\_PITCH





## Quick Specifications

#### **LED SYSTEM**

Proprietary linear LED Scout Engine incorporates premium Cree LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance.

Available in 2200K, 2700K, 3000K, 3500K, 4000K or 5000K in 90+ CRI. LED modules and drivers are replaceable.

#### Color accuracy <3 SDCM

#### CONSTRUCTION

One piece extruded aluminum housing. Cast aluminum end caps.

#### **OPTICS**

Injected Molded Grazer Optic. 10x60 Distribution. Optics cut at 3.75" intervals.

#### **ELECTRICAL**

Fixture come preassembled with 8" whip.

All Drivers are installed in remote location.

All drivers are Universal input 120-277 VAC.

Standard Constant Current drivers include 0-10V dimming preinstalled in an enclosure.

#### **LABELS**

Conforms To UL STD 2108Certified To CSA STD C22.2 # 250.0 Suitable for Dry or Damp Locations, indoor use only.

#### FINISH


Standard Mill Aluminum Finish.

Powder Coating to any RAL# available upon specification


#### WARRANTY

5 Year Limited Warranty - Covers all Scout manufactured products. Default to manufactures warranty for all 3rd party components.

#### Dimensions



#### Candela Polor Plot




Grazer

#### Grazer Lens: Visible Diodes - 8% Light Loss

OUTPUT	SL	L	M	Н	SH
Lumens / Foot	212	376	624	1058	1232
Watts / Foot	1.6	2.8	4.8	8.3	9.8
Lumens / Watt	135	133	131	127	125

#### Fixture Anatomy

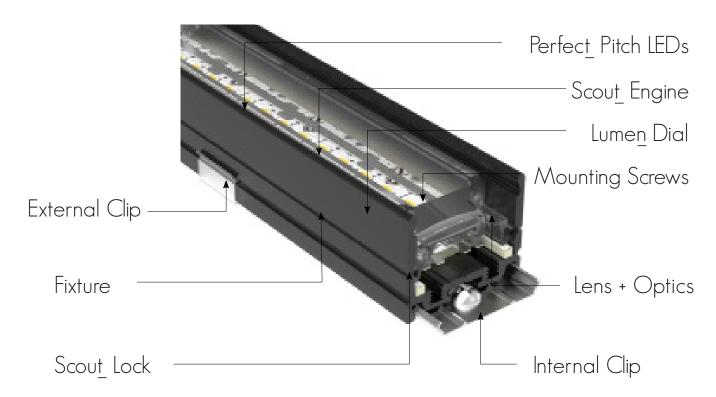

### Perfect Pitch LEDS

Achieve an uncompromisable layer of architectural lighting at any intensity through LED spacing that never change with the intensity. This means no hot-spots and imaging when paired with the Milky lens.

### Scout Engine

Rigid boards Plug and Play together.

Cuttable to 1/2 Inch

#### Mounting Screws

No more double sided tape!

Scout's Rigid Engines are held firmly in place with screws.

#### Lumen Dial

A patent pending circuit design delivers 3 separate intensities within a single engine. One engine, one pitch is the only way to simply and brilliantly bring a vision to reality.

#### Blind Clip

Scout's Wrap Around Blind Clip makes blind cove installation a breeze..

Also comes in Magnetic mounting

#### **Fixture**

Designed from the ground up to be a module system.

Each fixture is 100% custom to you. Pre assembled and cut to the 1/2 inch

We can powder coat to any finish you desire.

#### Scout Lock

Developed with a straightforward installation process in mind, engine connectors quickly lock together. No tools are necessary even when housing in the Scout Select Channel.

#### Flush Mount Clip

Scout's Surface mounting clip sits flush when installed. Once installed you'll never see it again!

Also comes in Magnetic mounting

#### Lens + Optics

Scout offers multiple lens options for you. Frosted lens for maximum output, Milky lens for visible hot-spot free illumination and a 10 degree grazer to make those textured walls pop.






## Feed Options



## Blind Cove Option

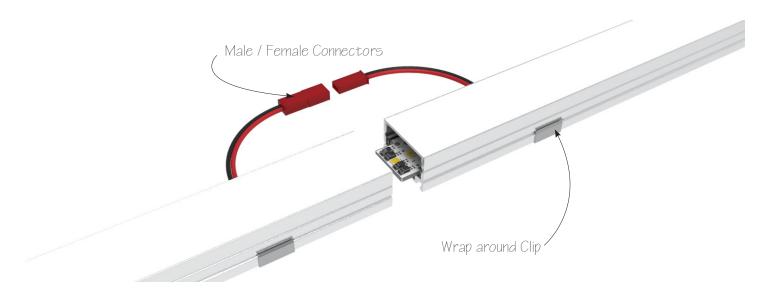


Scout offers a blind cove option for those hard to reach and see installs. The wrap around clip makes mounting a breeze and male / female connectors help make connections when you can't see.






### Finish Jumpers



Powder Coat any Scout Fixture to any RAL #
Scout Fixtures come standard Mill Finish Aluminum


Your Fixture. Your Design. Customized.

Price Adder for Powder Coating

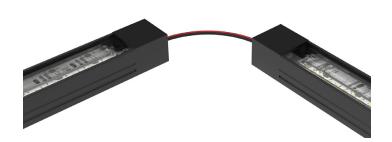

Whether you're turning an angle or daisy chaining the Scout Fixtures can be connected with any length of wire you choose.

## Patterns

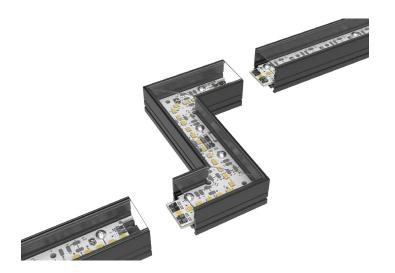


Scout fixtures come completely preassembled.

All the installers need to do is simply slide them together.

New power feeds can be injected anywhere.

Never have a break in light!

#### Illuminated Corners



Scouts Illuminated corners come in both Left and Right Directions.

The corners snap into place with Scout Lock technology.






#### Mounting Clips



#### INTERNAL CLIP PART # SMI

Ships with 1/2" #4 Screw Use #1 Phillips Bit Driver




Ø.125'




#### EXTERNAL CLIP PART # SME


Ships with 1/2" #4 Screw Use #1 Phillips Bit Driver






#### INTERNAL MAGNETIC PART # SMIMAG








EXTERNAL MAGNETIC PART # SMEMAG







#### 9/16 T GRID - INTERNAL PART # SMIT9/16


Ø.125"




## **PART # SMET15/16**


1.03" 1.39"















## Tiltable Stand



## TILTABLE STAND PART # SMETILT

Ships with 2 @ 1/2" #4 Screw Use #1 Phillips Bit Driver






## Elevated Stand



#### ELEVATED CLIP PART # SMEELV


Ships with 2 @ 1/2" #4 Screw Use #1 Phillips Bit Driver



Elevate your Scout Fixture above your driver for simple wiring and installation`



#### Drivers

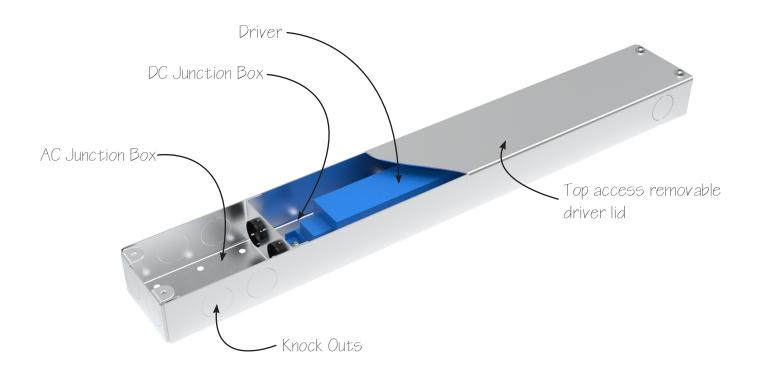

All scout drivers come preinstalled inside of NEMA rated enclosures.

Our proprietary driver enclosures come with AC and DC Junction boxes and knockouts around the perimeter.

Contractors can use our AC junction box to make branch circuit connections.


/	IVIUX DISIGNICE		
Super Low (50mA)	40 Feet	20 AWG 20 Feet	
Low (89mA)	22 Feet	18 AWG 40 Feet	
Medium (149mA)	13 Feet	16 AWG 60 Feet	
High (250mA)	8 Feet	14 AWG 100 Feet	
Super High (300mA)	5 Feet	12 AWG 150 Feet	

May Distance


Max Load  $(2000 \text{m} \Delta)$ 




## 0-10 Wiring

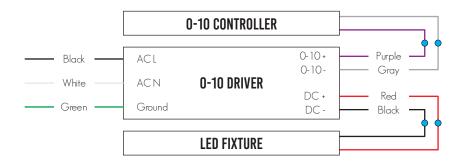

## Phase Wiring

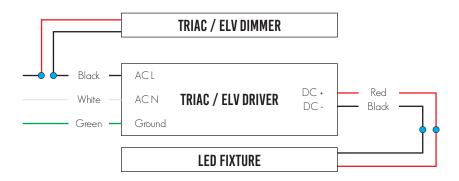


## DMX Wiring

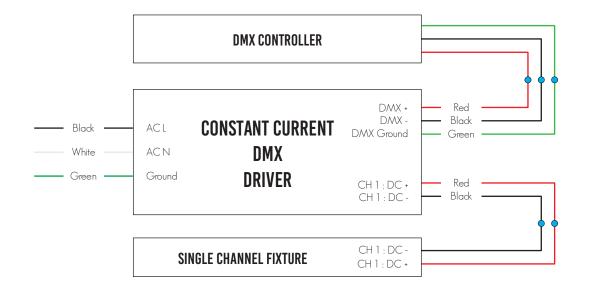






## Internal Clip Install

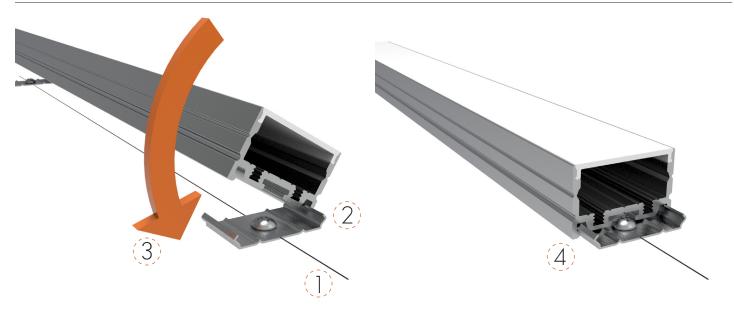

- 1. Draw / Laser / Chalk a straight line and install clips on mounting plane.
- 2. Slide one edge of the Fixture against the clip.
- 3. Rotate Fixture down.
- 4. Snap the Fixture into the clip.

## External Clip Install

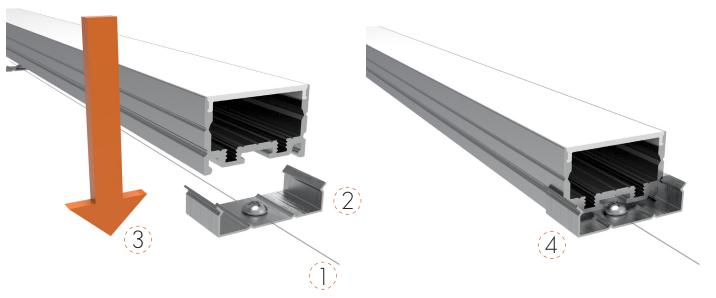

- 1. Draw / Laser / Chalk a straight line and install clips on mounting plane.
- 2. Insert Fixture straight down into the Blind Clip.
- 3. Push Fixture down.
- 4. Snap the Fixture into the clip.





## Specification Details

INTENSITY	S. LOW	LOW	MEDIUM	HIGH	S. HIGH
Watts / Foot	1.6	2.8	4.8	8.3	9.8
mA / Foot	50	89	149	256	300
Grazer Lens: Lumens/ Foot	212	376	624	1058	1232
Grazer Lens: Lumens/ Watt <sup>1</sup>	135	133	131	127	125
Color Temperatures (K)		2200, 27	00, 3000, 3500, 40	00, 5000	
CRI			90+		
R9			50+		
MacAdams Ellipses			3 Steps		
Beam Angle <sup>2</sup>			120 Degrees		
IP Rating			IP20 - Dry Location		
Lamp Life			50,000 Hours		
Dimming / Control <sup>3</sup>		0-10 / POE	/ DMX / DALI / PHAS	SE / LUTRON	
Operating Temperature			-13°F to 122°F		
Warranty			5 Years		
Max Driver Load at 2A	40 Feet	22 Feet	13 Feet	8 Feet	5 Feet
ETL	Confo	rms To UL STD 2	108 - Certified To CS	A STD C22.2 #	± 250.0

CCT	LUMINOUS FLUX
2200K	82%
2700K	100%
3000K	100%
3500K	115%
4000K	118%
5000K	106%

LUTRON					
LDE1	Hi-Lume 1% EcoSystem. Soft On, Fade to Black				
L3DAE	Hi-Lume 1% EcoSystem				
L3DA3W	Hi-Lume 1% 3 WIRE+G				
LTEA	Hi-Lume 1% 120V. 2-WIRE Forward Phase				

### Ordering Details

- All fixtures come standard with starter end cap feed unless otherwise specified.
- All Scout Select Fixtures come preassembled up to 8 feet long with 8" power feed.
- Any Fixture length under 8 feet long will be made as a complete fixture.
- Any Fixture length over 8 feet long will broken into 6 foot lengths + the balance length.
  - I.E. A 10 Foot Fixture will be broken into 1 length @ 6 Feet and 1 @ 4 Feet.
- Fixtures daisy chain together with Scout\_Lock<sup>TM</sup> Technology. See figures 1.1 and 1.2 below.
- In situations where fixtures are longer then the maximum wattage load new power will be injected from either the side or rear. Standard Injection is side Feed 1.
- All orders come with an approval drawing. Fabrication will not begin until drawing has been signed off or waived.

